


ASUS J1800I-C - motherboard - mini ITX - Intel Celeron J1800



23-05-2024

SKU	90MBOJ60-M0EAYM
Product Description:	ASUS J1800I-C - motherboard - mini ITX - Intel Celeron J1800
Product Type:	Motherboard - mini ITX
Processor:	Intel Celeron J1800 (Dual-Core)
Max RAM Size:	8 GB
RAM Supported:	2 SO-DIMM slots - DDR3L, non-ECC, unbuffered
Storage Ports:	2 x SATA-300
USB / FireWire Ports:	1 x USB 3.1 Gen 1 + 4 x USB 2.0 + (2 x USB 2.0 via headers)

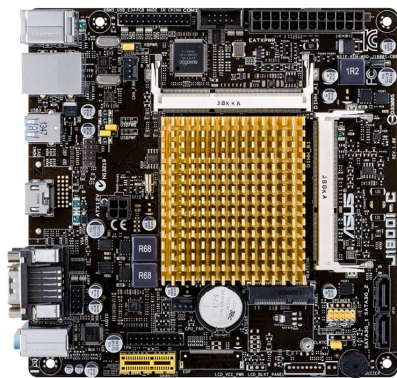

General

Product Type:	Motherboard - mini ITX
Processor:	Intel Celeron J1800 (Dual-Core)

Supported RAM

Max Size:	8 GB
Technology:	DDR3L
Bus Clock:	1333 MHz
Supported RAM Integrity Check:	Non-ECC
Registered or Buffered:	Unbuffered
Features:	Dual channel memory architecture

Graphics

Graphics Controller:	Intel HD Graphics
Max Allocated RAM Size:	512 MB

Audio

Type:	HD Audio (8-channel)
Audio Codec:	Realtek ALC887-VD
Compliant Standards:	High Definition Audio

LAN

Network Controller:	Realtek RTL8111G
Network Interfaces:	Gigabit Ethernet

Miscellaneous

Compliant Standards:	Plug and Play, ACPI 2.0a
Width:	17 cm
Depth:	17 cm

Features

BIOS Type:	AMI
BIOS Features:	WfM 2.0 support, ASUS MyLogo2, ASUS Quiet Thermal Solution, ASUS EZ Flash 2, ACPI 2.0a support, UEFI BIOS
Sleep / Wake Up:	Wake on LAN (WOL), wake on PME
Hardware Features:	Jack retasking, ASUS Anti-Surge Protection, ASUS EZ DIY, CrashFree BIOS 3, audio jack detect technology, ASUS Fan Xpert, Conductive Polymer Capacitors, USB 3.0 Boost, ASUS Network iControl, Intel Smart Connect Technology, ASUS Boot Setting, Preboot eXecution Environment (PXE)

Expansion / Connectivity

Expansion Slots:	2 x SO-DIMM 204-pin ; 1 x PCIe 2.0 x1 ; 1 x Mini PCIe
Storage Interfaces:	SATA-300 -connectors: 2 x 7pin Serial ATA
Interfaces:	4 x USB 2.0 ; 1 x HDMI ; 1 x LAN (Gigabit Ethernet) ; 1 x USB 3.1 Gen 1 ; 1 x PS/2 keyboard / mouse ; 1 x VGA ; 1 x serial ; 1 x audio line-out - mini-jack ; 1 x audio line-in - mini-jack ; 1 x microphone - mini-jack
Internal Interfaces:	2 x USB 2.0 - header ; 1 x serial - header ; 1 x audio - header ; 1 x parallel - header
Power Connectors:	4-pin ATX12V connector, 24-pin main power connector

