


ASUS J1900I-C - motherboard - mini ITX - Intel Celeron J1900

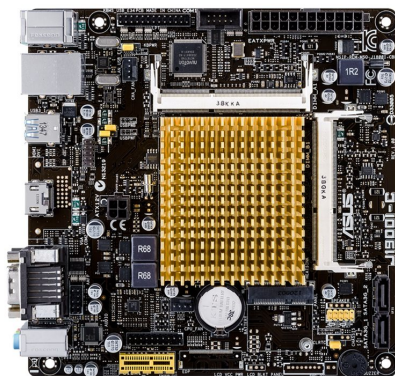

06-06-2024

SKU	J1900I-C
Product Description:	ASUS J1900I-C - motherboard - mini ITX - Intel Celeron J1900
Product Type:	Motherboard - mini ITX
Processor:	Intel Celeron J1900 (Quad-Core)
Max RAM Size:	8 GB
RAM Supported:	2 SO-DIMM slots - DDR3L, non-ECC, unbuffered
Storage Ports:	2 x SATA-300
USB / FireWire Ports:	1 x USB 3.0 + 4 x USB 2.0 + (2 x USB 2.0 via headers)

General

Product Type:	Motherboard - mini ITX
Processor:	Intel Celeron J1900 (Quad-Core)

Supported RAM

Max Size:	8 GB
Technology:	DDR3L
Bus Clock:	1333 MHz
Supported RAM Integrity Check:	Non-ECC
Registered or Buffered:	Unbuffered
Features:	Dual channel memory architecture

Graphics

Graphics Controller:	Intel HD Graphics
Max Allocated RAM Size:	512 MB

Audio

Type:	HD Audio (8-channel)
Audio Codec:	Realtek ALC887-VD
Compliant Standards:	High Definition Audio

LAN

Network Controller:	Realtek RTL8111G
---------------------	------------------

Miscellaneous

Included Accessories:	I/O back plate
Cables Included:	2 x Serial ATA cable
Software Included:	ASUS MyLogo2, ASUS EZ Flash 2, ASUS AI Charger, ASUS AI Suite III, ASUS EZ Update
Compliant Standards:	Plug and Play, ACPI 2.0a
Width:	17 cm
Depth:	17 cm

Features

BIOS Type:	AMI
BIOS Features:	WfM 2.0 support, ASUS MyLogo2, ASUS Quiet Thermal Solution, ASUS EZ Flash 2, ACPI 2.0a support, UEFI BIOS, SMBIOS 2.7 support
Sleep / Wake Up:	Wake on LAN (WOL), wake on PME
Hardware Features:	Jack retasking, ASUS Anti-Surge Protection, ASUS EZ DIY, CrashFree BIOS 3, audio jack detect technology, ASUS Fan Xpert, Conductive Polymer Capacitors, USB 3.0 Boost, ASUS Network iControl, Intel Smart Connect Technology, Preboot eXecution Environment (PXE), Clear CMOS Button

LAN

Network Interfaces: Gigabit Ethernet

Expansion / Connectivity

Expansion Slots: 2 x SO-DIMM 204-pin ; 1 x PCIe 2.0 x1 ; 1 x Mini PCIe

Storage Interfaces: SATA-300 -connectors: 2 x 7pin Serial ATA - 2 devices

Interfaces: 4 x USB 2.0 ; 1 x HDMI ; 1 x LAN (Gigabit Ethernet) ; 1 x USB 3.0 ; 1 x PS/2 keyboard / mouse ; 1 x VGA ; 1 x serial ; 1 x audio line-out - mini-jack ; 1 x audio line-in - mini-jack ; 1 x microphone - mini-jack

Internal Interfaces: 2 x USB 2.0 - header ; 1 x parallel - header ; 1 x audio - header

Power Connectors: 4-pin ATX12V connector, 24-pin main power connector

