


ASUS PRIME H410I-PLUS/CSM - motherboard - mini ITX - LGA1200 Socket - H410



27-05-2024

SKU	90MB14W0-M0EAYC
Product Description:	ASUS PRIME H410I-PLUS/CSM - motherboard - mini ITX - LGA1200 Socket - H410
Product Type:	Motherboard - mini ITX
Chipset Type:	Intel H410
Processor Socket:	1 x LGA1200 Socket
Compatible Processors:	(supports 10th Generation Intel Core / Pentium Gold / Celeron)
Max RAM Size:	64 GB
RAM Supported:	2 DIMM slots - DDR4, non-ECC, unbuffered

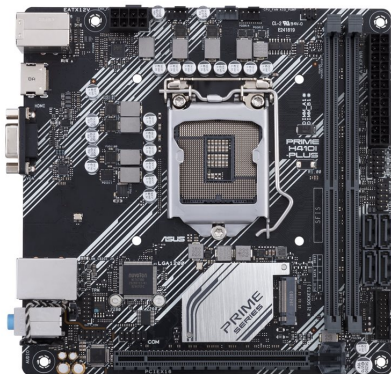

General

Product Type:	Motherboard - mini ITX
Chipset Type:	Intel H410
Processor Socket:	LGA1200 Socket
Max Processors Qty:	1
Compatible Processors:	(supports 10th Generation Intel Core / Pentium Gold / Celeron)

Supported RAM

Max Size:	64 GB
Technology:	DDR4
Bus Clock:	2400 MHz, 2133 MHz, 2800 MHz
Supported RAM Integrity Check:	Non-ECC
Registered or Buffered:	Unbuffered
Features:	Dual channel memory architecture, Intel Extreme Memory Profiles (XMP)

Audio

Type:	HD Audio (8-channel)
Audio Codec:	Realtek ALC887
Compliant Standards:	High Definition Audio

LAN

Network Controller:	Realtek RTL8111H
Network Interfaces:	Gigabit Ethernet

Miscellaneous

Cables Included:	2 x Serial ATA cable
Width:	17.02 cm
Depth:	17.02 cm

Features

BIOS Type:	AMI
BIOS Features:	UEFI BIOS

Sleep / Wake Up:	Wake on LAN (WOL), wake on PME
------------------	--------------------------------

Hardware Features:	ASUS Q-Design, ESD Guards, ASUS TurboV EVO, Q-DIMM, ASUS EZ DIY, Q-Slot, CrashFree BIOS 3, ASUS Q-Connector, ASUS EPU (Energy Processing Unit), Intel Turbo Boost Technology 2.0, ASUS DIGI+ VRM, ASUS Enhanced DRAM Overcurrent Protection, Preboot eXecution Environment (PXE), 8 Layer PCB, ASUS Stainless Steel Back I/O, LANGuard, ASUS Overvoltage Protection, ASUS Fan Xpert 4, ASUS 5X Protection III, ASUS SafeSlot Core, Intel Turbo Boost Max Technology 3.0, ASUS Aura Sync, ASUS OptiMem II, Armoury Crate, ASUS Control Center Express (ACC Express), 4+1+1 DrMOS Power Stages
--------------------	--

Expansion / Connectivity

Expansion Slots:	1 x CPU 2 x DIMM 288-pin 1 x PCIe 3.0 x16
Storage Interfaces:	SATA-600 -connectors: 4 x 7pin Serial ATA PCIe -connectors: 1 x M.2
Interfaces:	1 x VGA 1 x HDMI 2 x USB 3.2 Gen 1 2 x USB 2.0 1 x audio line-out - mini-jack 1 x microphone - mini-jack 1 x audio line-in - mini-jack 1 x PS/2 keyboard / mouse 1 x LAN (Gigabit Ethernet)
Internal Interfaces:	2 x USB 2.0 - header 2 x USB 3.2 Gen 1 - header 1 x audio - header 1 x serial - header 1 x speaker - header
Power Connectors:	24-pin main power connector, 8-pin ATX12V connector