


ASUS Pro B760M-CT-CSM - motherboard - micro ATX - LGA1700 Socket - B760

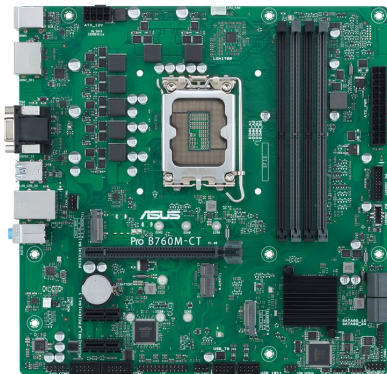

Not in stock

SKU	90MB1DY0-M0EAYC
Product Description:	ASUS Pro B760M-CT-CSM - motherboard - micro ATX - LGA1700 Socket - B760
Product Type:	Motherboard - micro ATX
Chipset Type:	Intel B760
Processor Socket:	1 x LGA1700 Socket
Compatible Processors:	(supports 12th and 13th Generation Intel Core / Pentium Gold / Celeron)
Max RAM Size:	192 GB
RAM Supported:	4 DIMM slots - DDR5, non-ECC, unbuffered

General

Product Type:	Motherboard - micro ATX
Chipset Type:	Intel B760
Processor Socket:	LGA1700 Socket
Max Processors Qty:	1
Compatible Processors:	(supports 12th and 13th Generation Intel Core / Pentium Gold / Celeron)

Supported RAM

Max Size:	192 GB
Technology:	DDR5
Bus Clock:	5000 MHz (O.C.), 5200 MHz (O.C.), 5400 MHz (O.C.), 5600 MHz (O.C.), 5800 MHz (O.C.), 6000 MHz (O.C.), 4800 MHz, 6200 MHz (O.C.)
Supported RAM Integrity Check:	Non-ECC
Registered or Buffered:	Unbuffered

Miscellaneous

Included Accessories:	IO shield, ACC Express Activation Key Card, 2 x M.2 screw package
Cables Included:	2 x Serial ATA cable
Software Included:	ASUS Control Center Express
Compliant Standards:	VCCI Class B ITE, JATE, FCC Part 15 Class B, DisplayPort 1.4, EU RoHS, EU REACH
Width:	24.4 cm
Depth:	24.4 cm
Pricing Type:	ASUS Corporate Stable Model (CSM)

Features

Sleep / Wake Up:	Wake on LAN (WOL), wake on PME
Hardware Features:	ASUS Q-Design, Q-DIMM, ASUS EZ DIY, Q-LED, Q-Slot, Preboot eXecution Environment (PXE), overcurrent protection, LANGuard, Trusted Platform Module (TPM) 2.0, ASUS Self Recovering BIOS, ASUS Event Log, ASUS Commercial BIOS kit, ASUS OptiMem II, ASUS Boot Defender, anti-moisture coating

Expansion / Connectivity

Supported RAM

Features:	Dual channel memory architecture, Intel Extreme Memory Profiles (XMP)
-----------	---

Audio

Type:	HD Audio (8-channel)
Compliant Standards:	High Definition Audio

LAN

Network Interfaces:	Gigabit Ethernet
---------------------	------------------

Expansion / Connectivity

Expansion Slots:	1 x CPU ! 4 x DIMM 288-pin ! 1 x PCIe 4.0 x16 ! 2 x PCIe 3.0 x1 ! 2 x M.2 socket (2242/2260/2280 M.2 Key M slot) ! 1 x M.2 socket (Key E)
Storage Interfaces:	SATA-600 -connectors: 4 x 7pin Serial ATA - RAID 0 / RAID 1 / RAID 10 / RAID 5 ! PCIe 4.0 -connectors: 2 x M.2
Interfaces:	1 x HDMI ! 2 x DisplayPort ! 1 x VGA ! 2 x USB 3.2 Gen 1 ! 2 x USB 2.0 ! 1 x LAN (Gigabit Ethernet) ! 1 x headphones output - mini-jack ! 1 x audio line-in - mini-jack ! 1 x microphone - mini-jack ! 1 x PS/2 keyboard ! 1 x PS/2 mouse
Internal Interfaces:	4 x USB 2.0 - header ! 2 x USB 3.2 Gen 1 - header ! 1 x USB-C 3.2 Gen 1 - header ! 1 x audio - header ! 2 x serial - header ! 1 x speaker - header
Power Connectors:	24-pin main power connector, 8-pin ATX12V connector

