


ASUS Pro H410M-C/CSM - motherboard - micro ATX - LGA1200 Socket - H410

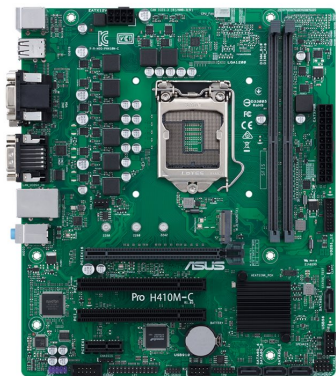

Not in stock

SKU	90MB1480-M0ECYC
Product Description:	ASUS Pro H410M-C/CSM - motherboard - micro ATX - LGA1200 Socket - H410
Product Type:	Motherboard - micro ATX
Chipset Type:	Intel H410
Processor Socket:	1 x LGA1200 Socket
Compatible Processors:	(supports 10th Generation Intel Core / Pentium Gold / Celeron)
Max RAM Size:	64 GB
RAM Supported:	2 DIMM slots - DDR4, non-ECC, unbuffered

General

Product Type:	Motherboard - micro ATX
Chipset Type:	Intel H410
Processor Socket:	LGA1200 Socket
Max Processors Qty:	1
Compatible Processors:	(supports 10th Generation Intel Core / Pentium Gold / Celeron)

Supported RAM

Max Size:	64 GB
Technology:	DDR4
Bus Clock:	2400 MHz, 2133 MHz, 2800 MHz, 2666 MHz, 2933 MHz
Supported RAM Integrity Check:	Non-ECC
Registered or Buffered:	Unbuffered
Features:	Dual channel memory architecture, Intel Extreme Memory Profiles (XMP)

Audio

Type:	HD Audio (8-channel)
-------	----------------------

Manufacturer Warranty

Service & Support:	Limited warranty - 3 years
--------------------	----------------------------

Miscellaneous

Included Accessories:	I/O back plate, 1 x M.2 screw
Cables Included:	2 x Serial ATA cable
Width:	24.4 cm
Depth:	20.8 cm

Features

BIOS Type:	AMI
BIOS Features:	UEFI BIOS
Sleep / Wake Up:	Wake on LAN (WOL), wake on PME
Hardware Features:	Jack retasking, audio jack detect technology, Intel Extreme Memory Profile (XMP) support, Intel Turbo Boost Technology 2.0, Preboot eXecution Environment (PXE), overcurrent protection, LANGuard, Intel Turbo Boost Max Technology 3.0, ASUS OptiMem, ASUS Self Recovering BIOS, ASUS Event Log, ASUS Commercial BIOS kit, ASUS Control Center Express (ACC Express)

Audio

Audio Codec:	Realtek ALC887
Compliant Standards:	High Definition Audio

LAN

Network Controller:	Intel I219V
Network Interfaces:	Gigabit Ethernet

Expansion / Connectivity

Expansion Slots:	1 x CPU ; 2 x DIMM 288-pin ; 1 x PCIe 3.0 x16 ; 1 x PCIe 3.0 x1 ; 2 x PCI
Storage Interfaces:	SATA-600 -connectors: 4 x 7pin Serial ATA ; SATA-600 / PCIe -connectors: 1 x M.2
Interfaces:	1 x VGA ; 1 x DVI-D ; 4 x USB 3.2 Gen 1 ; 2 x USB 2.0 ; 1 x HDMI ; 1 x audio line-out - mini-jack ; 1 x microphone - mini-jack ; 1 x audio line-in - mini-jack ; 1 x PS/2 keyboard ; 1 x PS/2 mouse ; 1 x LAN (Gigabit Ethernet) ; 1 x serial
Internal Interfaces:	4 x USB 2.0 - header ; 2 x USB 3.2 Gen 1 - header ; 1 x parallel - header ; 1 x serial - header ; 1 x speaker - header ; 1 x audio - header
Power Connectors:	24-pin main power connector, 8-pin ATX12V connector

