


ASUS RS100-E11-PI2 - rack-mountable - no CPU - 0 GB - no HDD

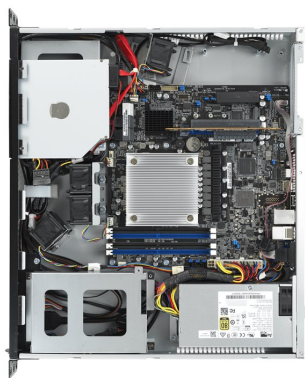

Not in stock

SKU	90SF02P1-M00110
Product Description:	ASUS RS100-E11-PI2 - rack-mountable - no CPU - 0 GB - no HDD
Type:	Server - rack-mountable
Height (Rack Units):	1U
Server Scalability:	1-way
Processor:	No CPU
Processor Socket:	LGA1200 Socket
RAM:	0 GB (installed) / 128 GB (max) - DDR4 SDRAM

General

Type:	Server
Product Form Factor:	Rack-mountable - 1U
Built-in Devices:	Led panel
Server Scalability:	1-way
Internal Bays Qty:	2
Colour:	Silver

Environmental Parameters

Min Operating Temperature:	10 °C
Max Operating Temperature:	35 °C
Humidity Range Operating:	20 - 90%

Dimensions & Weight (Shipping)

Shipping Weight:	11.7 kg
------------------	---------

Processor / Chipset

CPU:	No CPU
Max CPU Qty:	1
CPU Upgradability:	Upgradable
CPU Socket:	LGA1200 Socket
Chipset Type:	Intel C252

Dimensions & Weight

Width:	43 cm
Depth:	38 cm
Height:	4.4 cm
Weight:	7.5 kg

RAM

Installed Size:	0 GB / 128 GB (max)
Technology:	DDR4 SDRAM
Form Factor:	DIMM 288-pin
Slots:	4 (Total) / 4 (empty)
Features:	Unbuffered, dual channel memory architecture

Operating System / Software

OS Provided:	No operating system
--------------	---------------------

Power

Device Type:	Power supply
Power Provided:	350 Watt
80 PLUS Certification:	80 PLUS Gold

Miscellaneous

Compliant Standards:	FCC Class A certified, BSMI
----------------------	-----------------------------

Hard Drive

Type: No HDD

Storage Controller

Type: 2 x SATA

Controller Interface Type: SATA 6Gb/s

RAID Level: RAID 0, RAID 1, RAID 5, RAID 10

Optical Storage

Type: No optical drive

Monitor

Monitor Type: None.

Graphics Controller

Graphics Processor: ASPEED AST2600

Video Memory: 64 GB

Video Interfaces: VGA, HDMI

Expansion / Connectivity

Bays: 2 (total) / 2 (free) x internal 3.5"

Slots: 1 (total) / 1 (free) x PCIe 4.0 x16 ; 1 (total) / 1 (free) x M.2 Card - 2280

Interfaces: 1 x serial (1 rear) ; 2 x LAN (Gigabit Ethernet) - RJ-45 (2 rear) ; 1 x management - RJ-45 (1 rear) ; 2 x USB 3.2 Gen 1 (2 front) ; 2 x USB 3.2 Gen 2 (2 rear) ; 2 x VGA (1 front, 1 rear) ; 1 x HDMI (1 rear)

Networking

Ethernet Ports: 3 x Gigabit Ethernet

Ethernet Controller: 2 x Intel I210-AT

Data Link Protocol: Ethernet, Fast Ethernet, Gigabit Ethernet

