


ASUS WS C422 Pro/SE - motherboard - ATX - LGA2066 Socket - C422

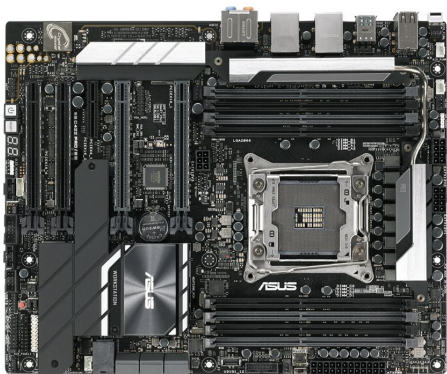

Not in stock

SKU	90SW0080-M0EAY0
Product Description:	ASUS WS C422 Pro/SE - motherboard - ATX - LGA2066 Socket - C422
Product Type:	Motherboard - ATX
Chipset Type:	Intel C422
Processor Socket:	1 x LGA2066 Socket
Compatible Processors:	Xeon
Max RAM Size:	512 GB
RAM Supported:	8 DIMM slots - DDR4, ECC, registered, Load-Reduced

General

Product Type:	Motherboard - ATX
Chipset Type:	Intel C422
Processor Socket:	LGA2066 Socket
Max Processors Qty:	1
Compatible Processors:	Xeon

Supported RAM

Max Size:	512 GB
Technology:	DDR4
Bus Clock:	2400 MHz, 2133 MHz, 2666 MHz
Supported RAM Integrity Check:	ECC
Registered or Buffered:	Registered, Load-Reduced
Features:	Quad channel memory architecture

Audio

Type:	HD Audio (8-channel)
Audio Codec:	Realtek ALC51220A
Compliant Standards:	DTS Connect, High Definition Audio, DTS Headphone:X

Manufacturer Warranty

Service & Support:	Limited warranty - 3 years
--------------------	----------------------------

Miscellaneous

Software Included:	ASUS AI Charger+, ASUS Control Center
Width:	30.5 cm
Depth:	24.4 cm

Features

BIOS Features:	Multilingual BIOS, ASUS Quiet Thermal Solution, USB BIOS Flashback, ASUS EZ Flash 3
Hardware Features:	Jack retasking, MemOK!, ASUS Q-Design, ESD Guards, Q-DIMM, ASUS EZ DIY, Q-LED, Q-Slot, CrashFree BIOS 3, audio jack detect technology, ASUS Q-Shield, NVIDIA 3-way SLI Technology Support, Intel Turbo Boost Technology 2.0, ASUS 8 Phase CPU Power Design, Q-Code, AMD 3-way CrossFireX technology support, ASUS 2 Phase DRAM Power Design, ASUS Enhanced DRAM Overcurrent Protection, ASUS Stainless Steel Back I/O, Turbo LAN, ASUS Overvoltage Protection, ASUS Crystal Sound 3, AURA RGB Lighting Control, ASUS 5X Protection III, ASUS SafeSlot Core, Intel VROC support, M.2 heatsink, ASMB9-iKVM

LAN

Network Controller:	Intel I210-AT
Network Interfaces:	2 x Gigabit Ethernet

Expansion / Connectivity

Expansion Slots:	1 x CPU 8 x DIMM 288-pin 2 x PCIe 3.0 x16 2 x PCIe 3.0 x16 (dual x8 mode; single card: x16 mode) 1 x PCIe 3.0 x4
Storage Interfaces:	SATA-600 -connectors: 6 x 7pin Serial ATA - RAID 0 / RAID 1 / RAID 10 SATA-600 / PCIe 3.0 -connectors: 1 x M.2 PCIe 3.0 -connectors: 1 x U.2 PCIe 3.0 -connectors: 1 x M.2
Interfaces:	2 x LAN (Gigabit Ethernet) 4 x USB 3.1 Gen 1 4 x USB 2.0 1 x TOSLINK 1 x USB 3.1 Gen 2 1 x USB-C Gen2 1 x audio line-out - mini-jack 1 x microphone - mini-jack 1 x audio line-out (center/subwoofer) - mini-jack 1 x audio line-out (rear) - mini-jack 1 x audio line-in - mini-jack
Internal Interfaces:	2 x USB 2.0 - header 2 x USB 3.1 Gen 1 - header 1 x USB 3.1 Gen 2 - header 1 x serial - header 1 x Thunderbolt - header
Power Connectors:	24-pin main power connector, 6-pin ATX12V connector, 2 x 8-pin ATX12V connectors

