


Axis C1211-E - IP speaker - for PA system

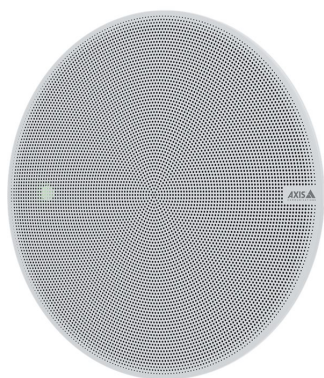

17-05-2024

SKU	02323-001
Product Description:	Axis C1211-E - IP speaker - for PA system
Product Type:	IP speaker - for PA system
Features:	DSP
Integrated Memory:	Flash - 512 MB
Protection:	Splashproof
Speaker Type:	Coaxial active
Frequency Response:	40 - 16000 Hz

General

Product Type:	IP speaker - for PA system
Features:	DSP, AXIS Audio Manager Edge, 2-way audio talkback
Integrated Memory:	Flash - 512 MB
Light:	LED lights
Microphone:	Yes
Protection:	Splashproof
Enclosure Material:	Plastic
Design Features:	Paintable
Grille Colour:	RAL 9010

Speaker System

Speaker Type:	Coaxial active
Frequency Response:	40 - 16000 Hz
Max Output Level (Max SPL):	93 dB
Maximum Sampling Rate Supported:	48 kHz
Amplifier:	Integrated
Amplifier Class:	D

Environmental Parameters

Min Operating Temperature:	-30 °C
Max Operating Temperature:	50 °C
Min Storage Temperature:	-40 °C
Max Storage Temperature:	65 °C
Humidity Range Operating:	10 - 100% RH (condensing)
Humidity Range Storage:	5 - 95% RH (non-condensing)

Manufacturer Warranty

Service & Support:	Limited warranty - 5 years
--------------------	----------------------------

Cutout & Mounting Dimensions

Diameter:	19.4 cm
-----------	---------

Dimensions & Weight

Diameter:	21.5 cm
Height:	15 cm
Weight:	2 kg

Power

Power Source:	Power over Ethernet (PoE)
---------------	---------------------------

Miscellaneous

Speaker System

Amplifier
Output Power: 7W

Coverage: 130°

Interfaces: IEEE 802.3 (Ethernet), IEEE 802.3u (Fast Ethernet), IEEE 802.3af (Power over Ethernet)

VoIP
Protocols: SIP, SRTP, SIPS

Voice Codecs: Speex, Opus, L16, PCMA, PCMU, G.726-32

Network
Protocols: TCP, ICMP, ARP, HTTP, DNS, SNMP, HTTPS, RTCP, RTP, NTP, UPnP, SSH, FTP, SSL, SFTP, TLS, IPv6, IPv4, CIFS, SMB, SMTP, DynDNS, RTSP, IGMP, DHCP, SOCKS, NTCIP, SIP

Recommended
Placing: In-ceiling mounted

Audio
Formats: WAV, PCM, G.726, MP3, ADPCM, AAC-LC, G.711

App-
Controlled: Yes

Miscellaneous

Compliant
Standards: CISPR 24, EN55024, EN 61000-6-1, EN 61000-6-2, EN 61000-6-4, IEC 60068-2-27, IEC 60068-2-6, EN 61000-6-3, IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-14, IEC 60068-2-78, VCCI Class B, EN 55032 Class B, KCC KN32 Class B, CISPR 32 Class B, KCC KN35, CAN/CSA-C22.2 No. 62368-1, UL 62368-1, EN 55035, CISPR 35, IEC/EN 60529 IP44, IEC/EN 62368-1, FCC Part 15 Subpart B Class B, ICES-3(B)/NMB-3(B), CAN/CSA-C22.2 No. 60950-22, UL 60529-22

Connections

Connector
Type: LAN (RJ-45) | Audio line-in / microphone (mini-phone stereo 3.5 mm) | (4 pin terminal block)

Speaker System Details

Driver
Details: Speaker: full-range driver - 4" - dynamic cone

Memory Card

Supported Memory
Cards: microSDHC, microSD, microSDXC

