


# Eaton ePDU G3 In-Line Monitored - power monitoring unit - 7 kW

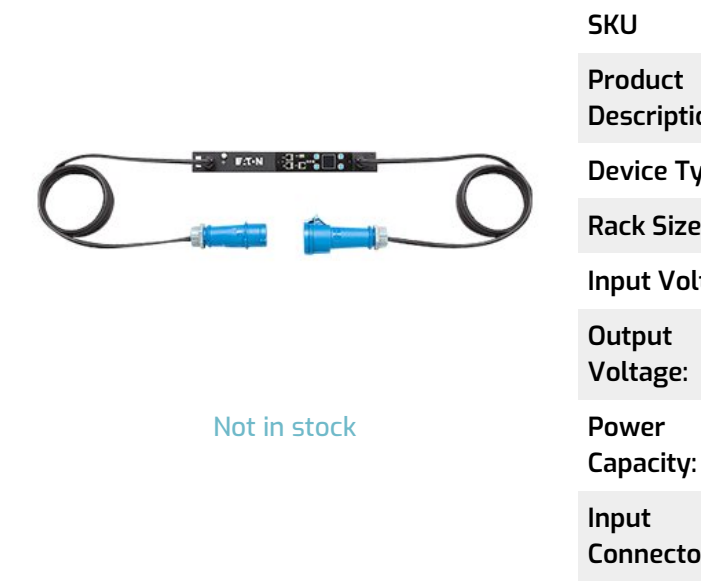

Not in stock

|                      |                                                                |
|----------------------|----------------------------------------------------------------|
| SKU                  | EILB14                                                         |
| Product Description: | Eaton ePDU G3 In-Line Monitored - power monitoring unit - 7 kW |
| Device Type:         | Power monitoring unit - rack-mountable                         |
| Rack Size:           | 0U                                                             |
| Input Voltage:       | AC 230 V                                                       |
| Output Voltage:      | AC 230 V                                                       |
| Power Capacity:      | 7 kW                                                           |
| Input Connectors:    | 1 x power IEC 60309 32A                                        |

## General

|                      |                                        |
|----------------------|----------------------------------------|
| Device Type:         | Power monitoring unit - rack-mountable |
| Height (Rack Units): | 0U                                     |
| Colour:              | Black                                  |

## Power Device

|                                  |                         |
|----------------------------------|-------------------------|
| Input Voltage:                   | AC 230 V                |
| Input Voltage Range:             | AC 200 - 240 V          |
| Frequency Provided:              | 50/60 Hz                |
| Frequency Required:              | 50/60 Hz                |
| Input Connectors:                | 1 x power IEC 60309 32A |
| Power Output Connectors Details: | 1 x power IEC 60309 32A |
| Output Voltage:                  | AC 230 V 50/60 Hz       |
| Max Electric Current:            | 32 A                    |
| Power Capacity:                  | 7 kW                    |

## Dimensions & Weight

|         |         |
|---------|---------|
| Width:  | 44.3 cm |
| Depth:  | 5.3 cm  |
| Height: | 5.2 cm  |

## Environmental Parameters

|                            |       |
|----------------------------|-------|
| Min Operating Temperature: | 0 °C  |
| Max Operating Temperature: | 60 °C |

## Miscellaneous

|                      |                                                |
|----------------------|------------------------------------------------|
| Cables Included:     | 2 x power cable - integrated - 3 m             |
| Features:            | LED display, voltage monitoring, current meter |
| Compliant Standards: | CB                                             |

## Expansion / Connectivity

|             |                                                                      |
|-------------|----------------------------------------------------------------------|
| Interfaces: | 1 x monitoring   1 x management (Ethernet)   1 x management (RS-232) |
|-------------|----------------------------------------------------------------------|

## Networking

|                              |                  |
|------------------------------|------------------|
| Remote Management Interface: | Ethernet, RS-232 |
|------------------------------|------------------|