


Eaton ePDU G3 Metered Input - power distribution unit

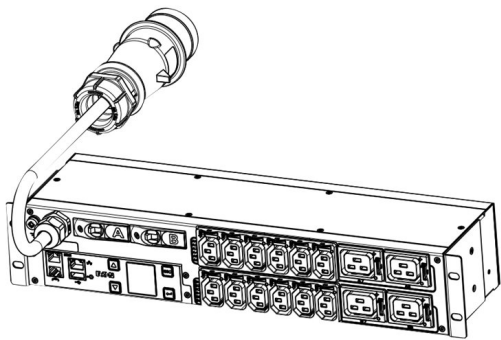

Not in stock

SKU	EMIH06
Product Description:	Eaton ePDU G3 Metered Input - power distribution unit
Device Type:	Power distribution unit - rack-mountable
Cord Length:	3 m
Rack Size:	2U
Input Wiring:	3-phase
Input Voltage:	AC 230 V
Input Connectors:	1 x power IEC 60309 32A

General

Device Type:	Power distribution unit - rack-mountable
Height (Rack Units):	2U
Cord Length:	3 m

Power Device

Input Voltage:	AC 230 V
Input Wiring:	3-phase
Frequency Required:	50 Hz
Input Connectors:	1 x power IEC 60309 32A
Power Output Connectors Details:	12 x power IEC 60320 C13 ; 4 x power IEC 60320 C19
Max Electric Current:	32 A
Circuit Protection:	Circuit breaker

Networking

Remote Management Interface:	Ethernet 10/100, RS-232
Remote Management Protocol:	SNMP, Telnet, HTTP, HTTPS, TFTP

Dimensions & Weight

Width:	48.26 cm
Depth:	12.7 cm
Height:	8.89 cm

Environmental Parameters

Min Operating Temperature:	0 °C
Max Operating Temperature:	60 °C

Manufacturer Warranty

Service & Support:	Limited warranty - 2 years
--------------------	----------------------------

Miscellaneous

Cables Included:	Power cable - integrated - 3 m
Features:	LCD display, voltage monitoring, current meter, power factor metre

Compliant Standards:	CB, EN 61000-6-2, IEC 60950-1, ISO 9001:2008, ISO 14001:2004, EN 60950-1:2006, EN55022:2010, RoHS 2011/65/EU, EN 55024:2010, WEEE 2012/19/EU, EN 61000-6-4:2007
----------------------	---

Expansion / Connectivity

Interfaces:	1 x management (Ethernet) - RJ-45 ; 1 x management (RS-232) - RJ-45 ; 1 x sensor - RJ-45 ; 1 x USB - 4 pin USB Type A
-------------	---