


Elo Desktop Touchmonitors 1717L iTouch Zero-Bezel - LED monitor - 17"

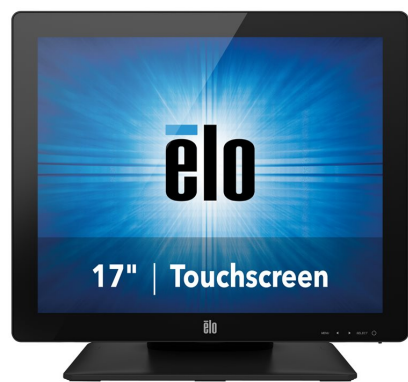

Not in stock

SKU	E017030
Product Description:	Elo Desktop Touchmonitors 1717L iTouch Zero-Bezel - LED monitor - 17"
Device Type:	LED-backlit LCD monitor - 17" - touchscreen
Energy Class:	Class E
Features:	Touch-screen
Aspect Ratio:	5:4
Native Resolution:	1280 x 1024 at 75 Hz
Brightness:	250 cd/m ²

General

Display Type:	LED-backlit LCD monitor / TFT active matrix
Energy Class:	Class E
Diagonal Size:	17"
Aspect Ratio:	5:4
Native Resolution:	1280 x 1024 at 75 Hz
Brightness:	250 cd/m ²
Brightness w/touchscreen:	225 cd/m ²
Contrast Ratio:	800:1
Colour Support:	16.7 million colours
Response Time:	5 ms (tr - tf)
Vertical Refresh Rate:	56 - 75 Hz
Horizontal Refresh Rate:	31.5 - 80 kHz
Horizontal Viewing Angle:	+85 / -85
Vertical Viewing Angle:	+80 / -80
Screen Coating:	Anti-glare
Backlight Technology:	LED backlight

Environmental Parameters

Min Operating Temperature:	0 °C
Max Operating Temperature:	40 °C
Humidity Range Operating:	20 - 80% (non-condensing)

Manufacturer Warranty

Service & Support:	Limited warranty - 3 years
--------------------	----------------------------

Power

Input Voltage:	AC 120/230 V (50/60 Hz)
Power Consumption SDR (On mode):	11 kWh/1000h
Power Consumption (Typical):	16 Watt
Power Consumption Stand by:	1.1 Watt
Power Consumption Sleep:	0.5 Watt

Miscellaneous

Features:	Security lock slot (cable lock sold separately), iTouch Surface Acoustic Wave Technology
MTBF:	50,000 hour(s)

General

Controls & Adjustments:	Brightness, contrast, H/V position, sharpness, colour balance, colour temperature, phase, clock, aspect control
OSD Languages:	Chinese (traditional), Chinese (simplified), English, German, French, Italian, Spanish, Japanese
Features:	Zero-Bezel Design, touch screen, iTouch Surface Acoustic Wave
Colour:	Black
Dimensions (WxDxH):	39.2 cm x 21.5 cm x 36.1 cm - with stand
Weight:	5.4 kg

Miscellaneous

Compliant Standards:	UL, VCCI, C-Tick, BSMI, cUL, CB, CCC, IC, FCC, RoHS, KCC, WEEE, S Mark, China RoHS
Localisation:	Worldwide

Mechanical

VESA Mounting Interface:	75 x 75 mm
--------------------------	------------

Connectivity

Interfaces:	Serial USB VGA
-------------	--------------------

Input

Type:	Touch-screen - touchscreen
Movement Detection Technology:	Surface acoustic wave

