

Honeywell PM43c - label printer - B/W - thermal transfer



Not in stock

SKU	PM43CA0110000402
Product Description:	Honeywell PM43c - label printer - B/W - thermal transfer
Printer Type:	Label printer - thermal transfer - B/W
Weight:	12.5 kg
Localisation:	United States
Max Media Size:	Roll (11.4 cm)
Min Media Size (Custom):	19.1 mm
Max Media Size (Custom):	114.3 mm

General

Printer Type:	Label printer - thermal transfer - monochrome
Localisation:	United States

Printer

Print Speed: Up to 250 mm/sec - max speed - 406 dpi

Built-in Devices:	Status LCD, touch screen
-------------------	--------------------------

Connectivity Technology:	Wireless
--------------------------	----------

Interface:	USB 2.0, LAN, serial, Bluetooth, Wi-Fi(n), USB 2.0 host
------------	---

Max Resolution (B&W):	406 dpi
-----------------------	---------

Language Simulation:	ZPL, Intermec Printer Language (IPL), Intermec Fingerprint, Intermec Direct Protocol, DSIm (Datamax Interpreter), ZSim, Extensible Mark-up Language (XML), DPL
----------------------	--

Barcodes:	EAN/JAN, Code 93, Matrix 2 of 5, Industrial 2 of 5, Code 39, Code 49, ISBT 128, QR code, MaxiCode, Aztec code, MicroPDF417, Codabar, Code 128, Code 11, Code 16K, UPC, Interleaved 2 of 5, Postnet, PDF417, MSI-Plessey, Data Matrix, PLANET, Plessey, Standard 2 of 5, Grid Matrix Code
-----------	--

Printer Features:	USB host
-------------------	----------

Dimensions & Weight

Width:	25.3 cm
Depth:	43.1 cm
Height:	18.1 cm
Weight:	12.5 kg

Environmental Parameters

Min Operating Temperature:	5 °C
Max Operating Temperature:	40 °C
Humidity Range Operating:	20 - 80% (non-condensing)

Environmental Standards

ENERGY STAR:	Yes
--------------	-----

Software / System Requirements

Software Included:	Drivers & Utilities
OS Required:	Microsoft Windows Vista (32/64 bits), Microsoft Windows 7 (32/64 bits), Microsoft Windows XP (32/64 bits), Microsoft Windows Server 2008 (32/64-bits), Microsoft Windows Server 2003 (32/64-bits)

RAM

RAM Installed (Max):	128 MB
Technology / Form Factor:	SDRAM

Flash Memory

Flash Memory:	128 MB
---------------	--------

Power

Power Device:	Power supply - internal
Voltage Required:	AC 120/230 V
Frequency Required:	50/60 Hz
Power Consumption Operational:	300 Watt

Miscellaneous

Included Accessories:	Short door, fixed media hanger, front access door
Compliant Standards:	FCC Class A certified, UL, C-Tick, cUL, EN55022 Class A, CCC, RoHS

Expansion / Connectivity


Expansion Slots:	1 x expansion slot
Connections:	1 x LAN - RJ-45 ; 1 x RS-232 - 9 pin D-Sub (DB-9) ; 1 x USB 2.0 - 4 pin USB Type B ; 1 x USB 2.0 - 4 pin USB Type A

Networking

Networking:	Print server
Remote Management Protocol:	SNMP 1, SNMP 3, SNMP 2c, HTTP
Security Protocols & Features:	LEAP, WEP, TLS, WPA, WPA2

Media Handling

Media Type:	Labels, linerless labels, fanfold paper, tag stock, tickets
Max Media Size:	Roll (11.4 cm)
Min Media Size (Custom):	19.1 mm
Max Media Size (Custom):	114.3 mm
Media Sizes:	Roll (1.9 - 11.4 cm)
Max Printing Width:	104 mm
Max Printing Length:	1219 mm

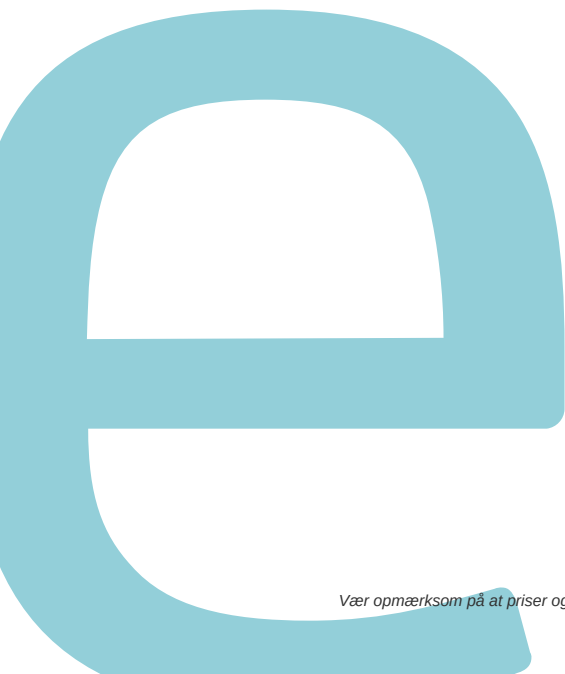

Media Handling

Roll Maximum Outer Diameter:	213 mm
---------------------------------	--------

Roll Core Diameter:	76.2 mm, 38.1 mm
------------------------	------------------

Media Feeders:	1 x manual - 1 roll - Roll (11.4 cm)
----------------	--------------------------------------

