


HP E27q G4 - LED monitor - 27"

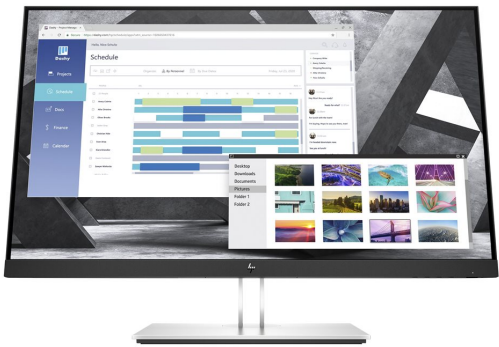

In Stock(122)

SKU	9VG82AA#ABB
Product Description:	HP E27q G4 - LED monitor - 27"
Device Type:	LED-backlit LCD monitor - 27"
Energy Class:	Class E
Power Consumption (On mode):	21.6 W
Features:	USB 3.2 Gen 1 hub
Panel Type:	IPS
Aspect Ratio:	16:9

General

Display Type:	LED-backlit LCD monitor / TFT active matrix
Energy Class:	Class E
Diagonal Size:	27"
Built-in Devices:	USB 3.2 Gen 1 hub
Panel Type:	IPS
Aspect Ratio:	16:9
Native Resolution:	QHD 2560 x 1440 at 60 Hz
Pixel Pitch:	0.233 mm
Pixel Per Inch:	109
Brightness:	250 cd/m ²
Contrast Ratio:	1000:1 / 5000000:1 (dynamic)
Response Time:	5 ms (grey-to-grey with overdrive)
Vertical Refresh Rate:	50 - 60 Hz
Horizontal Refresh Rate:	30 - 90 kHz
Horizontal Viewing Angle:	178

Environmental Parameters

Min Operating Temperature:	5 °C
Max Operating Temperature:	35 °C
Humidity Range Operating:	20 - 80% (non-condensing)

Sustainability Information

TCO Certified:	TCO Certified Displays 8, TCO Certified Edge Displays
ENERGY STAR Certified:	Yes

Dimensions & Weight (Shipping)

Shipping Width:	69.5 cm
Shipping Depth:	44.4 cm
Shipping Height:	22.5 cm
Shipping Weight:	10.5 kg

Dimensions & Weight

Dimensions & Weight Details:	With stand - width: 61.33 cm - depth: 21.6 cm - height: 53.6 cm - weight: 7 kg Without stand - width: 61.33 cm - depth: 4.7 cm - height: 36.61 cm
------------------------------	---

Power

Input Voltage:	AC 100 - 240 V (50/60 Hz)
----------------	---------------------------

General

Vertical Viewing Angle:	178
Screen Coating:	Anti-glare, 3H Hard Coating
Backlight Technology:	LED backlight
Features:	Flicker Free technology, Blue Light Filter technology, 3-sided micro-edge, 8-bit Colour Depth, HP Eye Ease
Colour:	Black
Dimensions (WxDxH):	61.33 cm x 21.6 cm x 53.6 cm - with stand
Weight:	7 kg

Connectivity

Interfaces:	DisplayPort HDMI 4 x USB 3.2 Gen 1 downstream (Type A) USB 3.2 Gen 1 upstream (Type B) VGA
-------------	--

Mechanical

Display Position Adjustments:	Height, pivot (rotation), swivel, tilt
Tilt Angle:	-5/+23
Swivel Angle:	90
Rotation Angle:	180
Height Adjustment:	150 mm
VESA Mounting Interface:	100 x 100 mm

Power

Power Consumption (On mode):	21.6 W
Power Consumption SDR (On mode):	21.6 kWh/1000h
Power Consumption (Typical):	25 Watt
Power Consumption Stand by:	0.5 Watt

Miscellaneous

Features:	Security lock slot (cable lock sold separately)
Cables Included:	1 x DisplayPort cable 1 x HDMI cable 1 x USB cable
Compliant Standards:	TUV GS, VCCI, BSMI, NOM, TUV S, CB, CCC, PSB, FCC, ISO 9241-307, KCC, WEEE, CEC, KC, CECP, CEL, EAC, ISC, SEPA, BIS, low halogen, DisplayPort 1.2, ICE, TUV LBL, TGM
Localisation:	English / Europe
Security Slot Type:	Kensington security slot

