


HP Z24n G3 - LED monitor - 24"

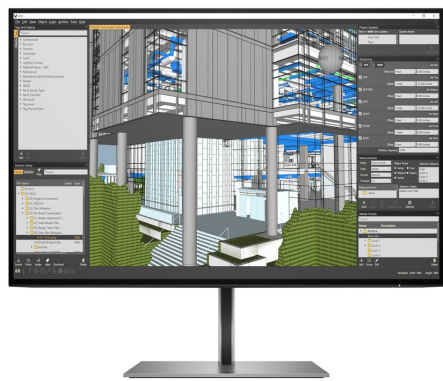

05-01-2026

SKU	1C4Z5AA#ABB
Product Description:	HP Z24n G3 - LED monitor - 24"
Device Type:	LED-backlit LCD monitor - 24"
Energy Class:	Class E
Energy Consumption per Year:	25 kWh
Power Consumption (On mode):	16.6 W
Features:	Joystick, USB 3.2 Gen 1 hub
Panel Type:	IPS

General

Display Type:	LED-backlit LCD monitor / TFT active matrix
Energy Class:	Class E
Energy Consumption per Year:	25 kWh
Diagonal Size:	24"
Built-in Devices:	USB 3.2 Gen 1 hub
Panel Type:	IPS
Aspect Ratio:	16:10
Native Resolution:	WUXGA 1920 x 1200 at 60 Hz
Pixel Pitch:	0.27 mm
Pixel Per Inch:	96
Brightness:	350 cd/m ²
Contrast Ratio:	1000:1 / 10000000:1 (dynamic)
Response Time:	5 ms (grey-to-grey with overdrive)
Vertical Refresh Rate:	50 - 60 Hz
Horizontal Refresh Rate:	30 - 75 kHz
Horizontal Viewing Angle:	178

Environmental Parameters

Min Operating Temperature:	5 °C
Max Operating Temperature:	35 °C
Humidity Range Operating:	20 - 80% (non-condensing)

Manufacturer Warranty

Service & Support:	Limited warranty - parts and labour - 3 years
--------------------	---

Sustainability Information

TCO Certified:	TCO Certified Displays 8, TCO Certified Edge Displays
ENERGY STAR Certified:	Yes

Dimensions & Weight (Shipping)

Shipping Width:	62.5 cm
Shipping Depth:	41.5 cm
Shipping Height:	14.2 cm
Shipping Weight:	7.6 kg

Dimensions & Weight

Dimensions & Weight Details:	With stand - width: 53.17 cm - depth: 19.5 cm - height: 52.14 cm - weight: 4.9 kg Without stand - width: 53.17 cm - depth: 3.85 cm - height: 34.29 cm - weight: 3.7 kg
------------------------------	---

General

Vertical Viewing Angle: 178

Screen Coating: Anti-glare, 3H Hard Coating, Haze 25%

Backlight Technology: LED backlight

OSD Languages: Chinese (traditional), Chinese (simplified), English, German, French, Italian, Portuguese, Spanish, Dutch, Japanese

Features: On-screen Digital Controls, Multi-Stream transport (MST), Low Blue Light Mode, Flicker Free technology, Factory Calibration, 4 Side Borderless Design, edge-lit LED backlight, 8-bit(6-bit + FRC) Colour Depth

Colour: Silver

Dimensions (WxDxH): 53.17 cm x 19.5 cm x 52.14 cm - with stand

Weight: 4.9 kg

Input

Type: Joystick

Connectivity

Interfaces: DisplayPort 1.2 output | DisplayPort 1.2 | HDMI | 4 x USB 3.2 Gen 1 | USB (Type B)

Power

Input Voltage: AC 100-240 V (50/60 Hz)

Power Consumption (On mode): 16.6 W

Power Consumption SDR (On mode): 16.6 kWh/1000h

Power Consumption (Typical): 28 Watt

Power Consumption Stand by: 0.5 Watt

Miscellaneous

Features: Security lock slot (cable lock sold separately), detachable stand, arsenic free, mercury free

Included Accessories: VESA bracket

Cables Included: 1 x DisplayPort cable - 1.8 m | 1 x USB-A to USB-B cable - 1.8 m

Backlight Life: 30,000 hours

Compliant Standards: Plug and Play, VCCI, BSMI, GS, NOM, TUV S, WHQL, CB, CCC, PSB, FCC, ISO 9241-307, KCC, WEEE, cTUVus, KC, CECP, CEL, EAC, SEPA, BIS, DisplayPort 1.2, UAE, Ukraine Energy Label

Localisation: English / Europe

Security Slot Type: Kensington security slot

Mechanical

Display Position Adjustments: Height, pivot (rotation), swivel, tilt

Tilt Angle: -5/+20

Swivel Angle: 90

Rotation Angle: 180

Height Adjustment: 150 mm

VESA Mounting Interface: 100 x 100 mm

