


# Intel Ethernet Network Adapter XXV710-DA2 - network adapter - OCP 2.0 - 25 Gigabit SFP28 x 2

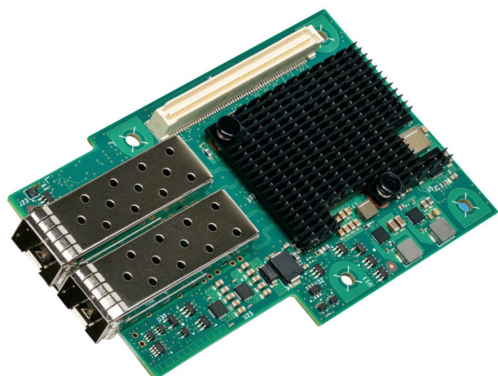

Not in stock

SKU	XXV710DA20CP2
Product Description:	Intel Ethernet Network Adapter XXV710-DA2 - network adapter - OCP 2.0 - 25 Gigabit SFP28 x 2
Device Type:	Network adapter
Form Factor:	Plug-in card
Interface (Bus) Type:	Open Compute Project mezzanine (OCP) 2.0
PCI Specification Revision:	PCIe 3.0
Ports:	25 Gigabit SFP28 x 2
Data Link Protocol:	1GbE, 10GbE, 25GbE

## General

Device Type:	Network adapter
Form Factor:	Plug-in card
Interface (Bus) Type:	Open Compute Project mezzanine (OCP) 2.0
PCI Specification Revision:	PCIe 3.0

## Environmental Parameters

Min Operating Temperature:	0 °C
Max Operating Temperature:	55 °C
Humidity Range Operating:	90% (non-condensing)

## Manufacturer Warranty

Service & Support:	Limited warranty - money back guarantee - lifetime
--------------------	--

## Miscellaneous

Compliant Standards:	FCC Class A certified, UL, VCCI, C-Tick, BSMI, RoHS, KCC, Directive 2011/65/EU
----------------------	--

## Expansion / Connectivity

Interfaces:	2 x 1 Gigabit Ethernet/10Gb Ethernet/25Gb Ethernet - SFP28
-------------	--

## Networking

Ports:	25 Gigabit SFP28 x 2
Connectivity Technology:	Wired
Data Link Protocol:	Gigabit Ethernet, 10 Gigabit Ethernet, 25 Gigabit Ethernet

## Networking

<b>Data Transfer Rate:</b>	25 Gbps
----------------------------	---------

<b>Network / Transport Protocol:</b>	TCP/IP, UDP/IP, iSCSI, SMB, NFS
--------------------------------------	---------------------------------

<b>Remote Management Protocol:</b>	SNMP, RMON
------------------------------------	------------

<b>Status Indicators:</b>	Port transmission speed, link/activity
---------------------------	--

<b>Features:</b>	Flow control, MPLS support, VLAN support, packet filtering, IPv6 support, TCP/IP offloading, QoS, VMDq, IPv4 support, teaming support, PXE support, LSO, GSO, RSS, SR-IOV, ALB, Energy Efficient Ethernet, TSO, checksum offload support, MSI-X, UDP/IP offloading, WDT, iSCSI boot, VXLAN, NVGRE, Intel Flow Director, DPDK
------------------	--

<b>Compliant Standards:</b>	IEEE 802.3, IEEE 802.1Q, IEEE 802.1p, IEEE 802.3ad (LACP), IEEE 802.1as, IEEE 802.1Qbg, IEEE 802.3by
-----------------------------	--

