


Intel Server System LSVRP4304ES6XXR - rack-mountable - Xeon E3-1230V6 3.5 GHz - 16 GB

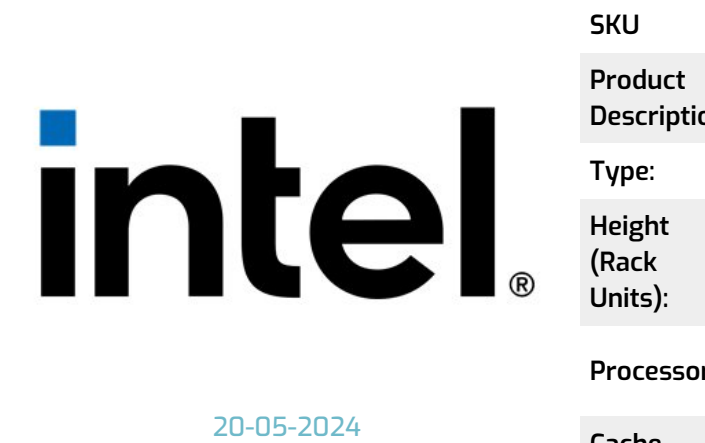

SKU	LSVRP4304ES6XXR
Product Description:	Intel Server System LSVRP4304ES6XXR - rack-mountable - Xeon E3-1230V6 3.5 GHz - 16 GB
Type:	Server - rack-mountable
Height (Rack Units):	4U
Processor:	1 x Intel Xeon E3-1230V6 / 3.5 GHz (, up to 3.9 GHz, (Quad-Core)
Cache Memory:	8 MB
Cache Per Processor:	8 MB
RAM:	16 GB (installed) / 64 GB (max) - DDR4 SDRAM - ECC

General

Type:	Server
Product Form Factor:	Rack-mountable - 4U
Embedded Security:	Trusted Platform Module (TPM 2.0) Security Chip
Internal Bays Qty:	1
Front Accessible Bays Qty:	4

Processor / Chipset

CPU:	Intel Xeon E3-1230V6
Clock Speed:	3.5 GHz
Max Turbo Speed:	3.9 GHz
Number of Cores:	Quad-Core
CPU Qty:	1
Max CPU Qty:	1
Chipset Type:	Intel C236

Cache Memory

Installed Size:	8 MB
Cache Per Processor:	8 MB

Manufacturer Warranty

Service & Support:	Limited warranty - 3 years
--------------------	----------------------------

Power

Device Type:	Power supply
Installed Qty:	1
Power Provided:	365 Watt

Expansion / Connectivity

Bays:	4 (total) / 4 (free) x hot-swap 2.5" / 3.5" shared ; 1 (total) / 1 (free) x internal
Slots:	1 (total) / 0 (free) x CPU ; 1 (total) / 1 (free) x PCIe 3.0 x8 ; 4 (total) / 3 (free) x DIMM 288-pin
Interfaces:	9 x USB ; 8 x SATA ; 1 x serial ; 2 x LAN (Gigabit Ethernet) - RJ-45 ; 1 x VGA

Networking

Ethernet Ports:	2 x Gigabit Ethernet
Data Link Protocol:	Ethernet, Fast Ethernet, Gigabit Ethernet
Remote Management Protocol:	IPMI 2.0

RAM

Installed Size:	16 GB / 64 GB (max)
Technology:	DDR4 SDRAM - ECC
Effective Memory Speed:	2133 MHz
Rated Memory Speed:	2133 MHz
Form Factor:	DIMM 288-pin
Slots:	4 (Total) / 3 (empty)
Features:	Unbuffered, dual channel memory architecture
Configuration Features:	1 x 16 GB

Networking

Features:	Intel Remote Management Module Support
-----------	--

Monitor

Monitor Type:	None.
---------------	-------

Optical Storage

Type:	No optical drive
-------	------------------

Storage Controller

Type:	RAID
Controller Interface Type:	SATA 6Gb/s
RAID Level:	RAID 0, RAID 1, RAID 5, RAID 10

