


Lexmark MarkNet N8372 - print server

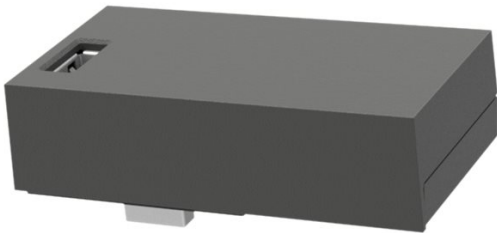

In Stock(4)

SKU	27X6410
Product Description:	Lexmark MarkNet N8372 - print server
Device Type:	Print server
Data Link Protocol:	Wi-Fi
Network / Transport Protocol:	TCP/IP, UDP/IP, NTP, ICMP/IP, IPSec, LPR/LPD, ARP, FTP, BOOTP, DHCP, DNS, RARP, SLP, DDNS
Compliant Standards:	IEEE 802.1x
System Requirements:	HP-UX 11.11, Novell NetWare 5.1 SP6 or later, Novell NetWare 6.0 SP3 or later, HP-UX 11.23, IBM AIX 5.3, SunSoft Solaris x86 10, Red Hat Enterprise Linux WS 4, SuSE Linux Enterprise Server 11, Microsoft Windows Server 2008 R2, Apple MacOS X 10.6, SUSE Linux Enterprise Desktop 11, Debian GNU/Linux 5.0, SUSE Linux Enterprise Desktop 10, SuSE Linux Enterprise Server 10, Red Hat Enterprise Linux WS 5, IBM AIX 6.1, Microsoft Windows Vista (32/64 bits), HP-UX 11.31, Red Flag Linux Desktop 6.0, Linux Linpus Desktop 9.6, Microsoft Windows 7 (32/64 bits), Microsoft Windows Server 2008 (32/64-bits), SunSoft Solaris SPARC Platform Edition 9, SunSoft Solaris SPARC Platform Edition 10, Apple MacOS X Lion 10.7, openSUSE 11.4, Apple iOS 4.2 or later, IBM AIX 7.1, Linux Mint 11, SunSoft Solaris x86 11, Debian GNU/Linux 6.0, Linux Mint 10, Red Hat Enterprise Linux WS 6, Ubuntu 12.04, Microsoft Windows Server 2012, Apple OS X 10.8 Mountain Lion, Windows 8 (32/64 bits), openSUSE 12.2, openSUSE 12.1, Linux Mint 12, SunSoft Solaris SPARC Platform Edition 11, Red Hat Fedora 17, Android 4.1.2 (Jelly Bean), Ubuntu 12.10, Android 4.2.2 (Jelly Bean), Android 4.3 (Jelly Bean), Windows 8.1 (32/64 bits), Windows 8.1 RT, Microsoft Windows Server 2012 R2, Windows RT, Apple OS X 10.9 Mavericks, Red Hat Fedora 18, Linux Mint 13, PCLinuxOS 2011, Android 4.4.2 (KitKat), Red Hat Fedora 19, Apple MacOS X 10.10
Designed For:	Lexmark B2650, B2865, C2425, C2535, C4342, C5730, C5735, CX421, CX522, CX622, CX625, CX730, CX735, MB2546, MB2770, MB3442, MC2425, MC2535, MC2640, MC3426, MS821, MS823, MX331, MX431, MX522, MX622, MX721, MX722, MX822, MX826, MX931, XC2235, XC4240, XM1246, XM3250, XM5365, XM5370, XM7355, XM7370

General

Device Type: Print server

Networking

Connectivity Technology: Wireless

Data Link Protocol: Wi-Fi

Network / Transport Protocol: TCP/IP, UDP/IP, NTP, ICMP/IP, IPSec, LPR/LPD, ARP, FTP, BOOTP, DHCP, DNS, RARP, SLP, DDNS

Remote Management Protocol: SNMP 1, Telnet, SNMP 3, SNMP 2c, HTTP, HTTPS, TFTP, IPP 1.0, IPP 1.1, IPP 2.0

Compliant Standards: IEEE 802.1x

Miscellaneous

Included Accessories: Mounting bracket, NFC tag, pod

Encryption Algorithm: LEAP, MD5, TLS, PEAP, TTLS

Compatibility Information

Lexmark B2338DW, B2442dw, B2650DN, B2865dw, C2425dw, C2535dw, C4342, C5421dn, C5521dn, C5622de, C5720de, C5720dte, C5725de, C5725dte, C5730de, C5735de, CX421adn, CX522ade, CX522de, CX622ade, CX622de, CX625ade, CX625adhe, CX625de, CX725de, CX725dhe, CX730de, CX735adse, MB2546ade, MB2770adwhe, MB3442adw, MB3442i, MC2325adw, MC2425adw, MC2535adwe, MC2640adwe, MC3426adw, MC3426i, MS621dn, MS622de, MS725dvn, MS821dn, MS821n, MS822de, MS823dn, MS823n, MS825dn, MS826de, MX331adn, MX331dn, MX421ade, MX431adw, MX431dn, MX521ade, MX521de, MX522adhe, MX522dhe, MX622ade, MX622adhe, MX622de, MX721ade, MX721adhe, MX722ade, MX722adhe, MX722de, MX722dhe, MX822ade, MX822adte, MX822adxe, MX822de, MX826ade, MX826adxe, MX826de, MX931dse, XC2235, XC4240i, XM1246i, XM3250i, XM5365i, XM5370i, XM7355b, XM7355bi, XM7355i, XM7370i

Designed For:


Environmental Parameters

Min Operating Temperature: 16 °C
Max Operating Temperature: 32 °C
Humidity Range Operating: 8 - 80%

Dimensions & Weight (Shipping)

Shipping Width: 20.3 cm
Shipping Depth: 30.5 cm
Shipping Height: 16.5 cm
Shipping Weight: 417 g

Software / System Requirements

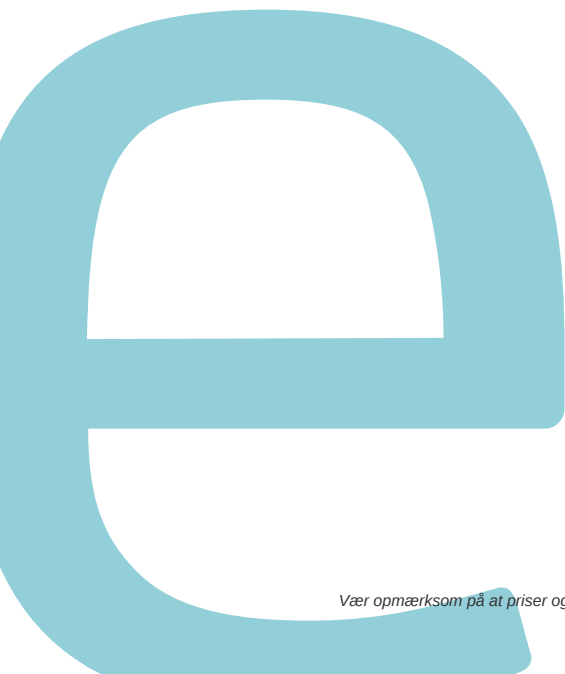

Software / System Requirements

HP-UX 11.11, Novell NetWare 5.1 SP6 or later, Novell NetWare 6.0 SP3 or later, HP-UX 11.23, IBM AIX 5.3, SunSoft Solaris x86 10, Red Hat Enterprise Linux WS 4, SuSE Linux Enterprise Server 11, Microsoft Windows Server 2008 R2, Apple MacOS X 10.6, SUSE Linux Enterprise Desktop 11, Debian GNU/Linux 5.0, SUSE Linux Enterprise Desktop 10, SuSE Linux Enterprise Server 10, Red Hat Enterprise Linux WS 5, IBM AIX 6.1, Microsoft Windows Vista (32/64 bits), HP-UX 11.31, Red Flag Linux Desktop 6.0, Linux Linpus Desktop 9.6, Microsoft Windows 7 (32/64 bits), Microsoft Windows Server 2008 (32/64-bits), SunSoft Solaris SPARC Platform Edition 9, SunSoft Solaris SPARC Platform Edition 10, Apple MacOS X Lion 10.7, openSUSE 11.4, Apple iOS 4.2 or later, IBM AIX 7.1, Linux Mint 11, SunSoft Solaris x86 11, Debian GNU/Linux 6.0, Linux Mint 10, Red Hat Enterprise Linux WS 6, Ubuntu 12.04, Microsoft Windows Server 2012, Apple OS X 10.8 Mountain Lion, Windows 8 (32/64 bits), openSUSE 12.2, openSUSE 12.1, Linux Mint 12, SunSoft Solaris SPARC Platform Edition 11, Red Hat Fedora 17, Android 4.1.2 (Jelly Bean), Ubuntu 12.10, Android 4.2.2 (Jelly Bean), Android 4.3 (Jelly Bean), Windows 8.1 (32/64 bits), Windows 8.1 RT, Microsoft Windows Server 2012 R2, Windows RT, Apple OS X 10.9 Mavericks, Red Hat Fedora 18, Linux Mint 13, PCLinuxOS 2011, Android 4.4.2 (KitKat), Red Hat Fedora 19, Apple MacOS X 10.10

OS Required:

