


Philips 32BDL3510Q Q-Line - 32" Class (31.5" viewable) LED-backlit LCD display - Full HD - for digital signage

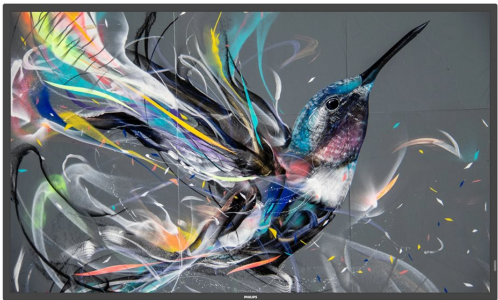

29-05-2024

SKU	32BDL3510Q/00
Product Description:	Philips 32BDL3510Q Q-Line - 32" Class (31.5" viewable) LED-backlit LCD display - Full HD - for digital signage
Product Type:	LED-backlit LCD flat panel display
Diagonal Class:	32"
Diagonal Size:	31.5"
Commercial Use:	Yes - digital signage
Resolution:	1920 x 1080
Display Format:	1080p

General

Product Type:	LED-backlit LCD flat panel display
Energy Class:	Class G
Power Consumption Operational:	65 Watt
Power Consumption (On mode):	40 W
Power Consumption SDR (On mode):	40 kWh/1000h
Diagonal Class:	32"
Diagonal Size:	31.5"
Commercial Use:	Yes - digital signage
Series:	Q-Line
TV Tuner:	No tuner
TV Tuner Presence:	No
Video Interface:	HDMI
HDMI Ports Qty:	2 ports
PC Interface:	DVI
Modes:	Portrait mode, landscape mode

Environmental Parameters

Min Operating Temperature:	0 °C
Max Operating Temperature:	40 °C
Humidity Range Operating:	20 - 80% (non-condensing)

Manufacturer Warranty

Service & Support:	Limited warranty - 3 years
--------------------	----------------------------

Power

Power Device:	Power supply
Input Voltage:	AC 120/230 V (50/60 Hz)
Power Consumption Stand by:	0.5 Watt
Features:	Smart power

Miscellaneous

Included Accessories:	USB flash drive cover
-----------------------	-----------------------

General

Picture Enhancements:	Motion Compensation, dynamic contrast enhancement, 3D Combfilter
Dimensions:	Without stand
Width:	72.65 cm
Depth:	6.91 cm
Height:	42.54 cm
Weight:	5.31 kg

Display

LCD Display Technology:	VA
Resolution:	1920 x 1080
Display Format:	1080p
Image Aspect Ratio:	16:9
LCD Backlight Technology:	Direct LED
Image Contrast Ratio:	4000:1
Dynamic Contrast Ratio:	500000:1
Brightness:	350 cd/m²
Viewing Angle:	178 degrees
Viewing Angle (Vertical):	178 degrees
Pull-Down Compensation:	3:2, 2:2
Response Time:	6.5 ms
Display Menu Language:	Chinese (traditional), Chinese (simplified), English, German, French, Italian, Polish, Russian, Spanish, Turkish, Arabic, Japanese
Backlight Life:	50,000 hour(s)
Commercial Features:	CMND management, FailOver
Operation Hours / Days:	18 / 7
Features:	3D MA deinterlacing

Miscellaneous

Cables Included:	RS232 cable IR sensor cable - 1.8 m
Compliant Standards:	FCC Class A certified, VCCI, BSMI, CB, ETL, EPA, CU

Connections

Connector Type:	DVI-I input 2 x HDMI 2 x USB 2.0 Audio line-in Audio line-out RS-232C input/output Infrared input/output Remote control
-----------------	---

Network & Internet Multimedia

Connectivity:	LAN
---------------	-----

Audio System

Speaker System:	2 speakers
Output Power / Total:	20 Watt
Speakers:	2 x speaker - 10 Watt

Remote Control

Type:	Remote control
Battery Included:	Yes

Media Player

Supported Video Formats:	WMV, H.264, MPEG
Supported Audio Formats:	WMA, AAC, HE-AAC
Supported Pictures Formats:	BMP, PNG, JPEG
USB Port:	Yes
USB Ports Qty:	2

Video Features

Input Video Formats:	1080/60i, 480/60p, 720/60p, 1080/50i, 576/50p, 1080/50p, 1080/60p, 480/60i, 576/50i
----------------------	---

Video Wall

Max Number of Screens: 225

Stands & Mounts

Flat Panel Mount Interface: 100 x 100 mm, 200 x 200 mm

VESA Compatibility: Yes

Video Features

Supported Computer Resolutions: 1024 x 768 (XGA), 640 x 480 (VGA), 800 x 600 (SVGA), 832 x 624, 1280 x 1024 (SXGA), 1600 x 1200 (UXGA), 1152 x 864, 1280 x 720, 720 x 400, 1152 x 870, 1680 x 1050 (WSXGA+), 1920 x 1080, 1440 x 900, 1280 x 800

