

Samsung VH55R-R - 55" Diagonal Class VHR-R Series LED-backlit LCD display - digital signage - 1080p 1920 x 1080 - direct-lit LED - shiny



Not in stock

SKU	LH55VHRRBGBXEN
Product Description:	Samsung VH55R-R VHR-R Series - 55" LED-backlit LCD display - Full HD - for digital signage
Product Type:	LED-backlit LCD flat panel display
Diagonal Class:	55"
Commercial Use:	Yes - digital signage
Colour:	Shiny
Resolution:	1920 x 1080
Display Format:	1080p

General

Product Type:	LED-backlit LCD flat panel display
Energy Class:	Class G
Power Consumption Operational:	270 Watt
Power Consumption (On mode):	153 W
Power Consumption SDR (On mode):	153 kWh/1000h
Energy Consumption per Year:	200 kWh
Diagonal Class:	55"
Commercial Use:	Yes - digital signage
Series:	VHR-R Series
TV Tuner:	No tuner
TV Tuner Presence:	No
Video Interface:	HDMI
HDMI Ports Qty:	2 ports
PC Interface:	DVI, DisplayPort
Dimensions:	Without stand
Width:	121.1 cm

Environmental Parameters

Min Operating Temperature:	0 °C
Max Operating Temperature:	40 °C
Humidity Range Operating:	10 - 90%

Dimensions & Weight (Shipping)

Width (Shipping):	141.4 cm
Depth (Shipping):	25.7 cm
Height (Shipping):	84.4 cm
Weight (Shipping):	25.1 kg

Power

Power Device:	Power supply
Input Voltage:	AC 120/230 V (50/60 Hz)
Power Consumption Sleep:	0.5 Watt

Miscellaneous

General

Depth:	6.99 cm
Height:	68.17 cm
Weight:	16.8 kg
Enclosure Colour:	Shiny

Miscellaneous

Compliant Standards:	CSA, UL, TUV, VCCI, C-Tick, BSMI, GOST, cUL, NEMKO, NOM, SASO, CB, AS/NZS 60950-1, CCC, PSB, IRAM, IEC 60950-1, EN 60950-1, FCC Part 15 B Class A, KC, GB 9254-2008, NOM-019-SCFI-1998, KN22, KN24, K60950-1, cUL No.60950-1, EAC, RCM, IS13252, VCCI V-3/2010.04 Class A, CNS 14972, GOST 22505-97, CNS 13438 Class A ITE EMI, CNS 13439 AV EMI, CNS 14409 AV EMS, GB 17625.1-2012, GOST-R 51317, BIS, INMETRO, GB 4943.1-2011, AS/NZS CISPR 22:2009, KCC/EK, EN 55024:1998+A1:2001+A2:2003, EN 55022:2006+A1:2007
----------------------	---

Connections

Connector Type:	2 x HDMI DisplayPort input DisplayPort output DVI USB Audio line-in Audio line-out RS-232 LAN
-----------------	---

Network & Internet Multimedia

Connectivity:	LAN
---------------	-----

Media Player


USB Port:	Yes
USB Ports Qty:	1


Stands & Mounts

Stand:	Optional
Flat Panel Mount Interface:	600 x 400 mm
VESA Compatibility:	Yes

Display

Resolution:	1920 x 1080
Display Format:	1080p
Image Aspect Ratio:	16:9
LCD Backlight Technology:	Direct-lit LED
Image Contrast Ratio:	1100:1

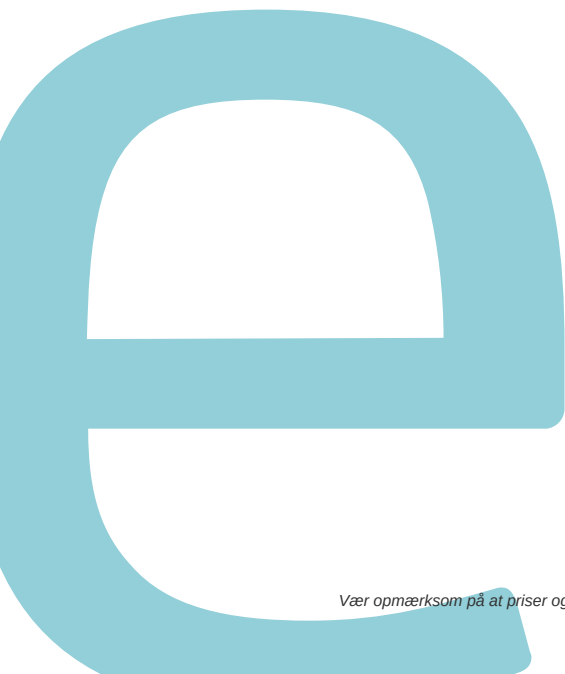

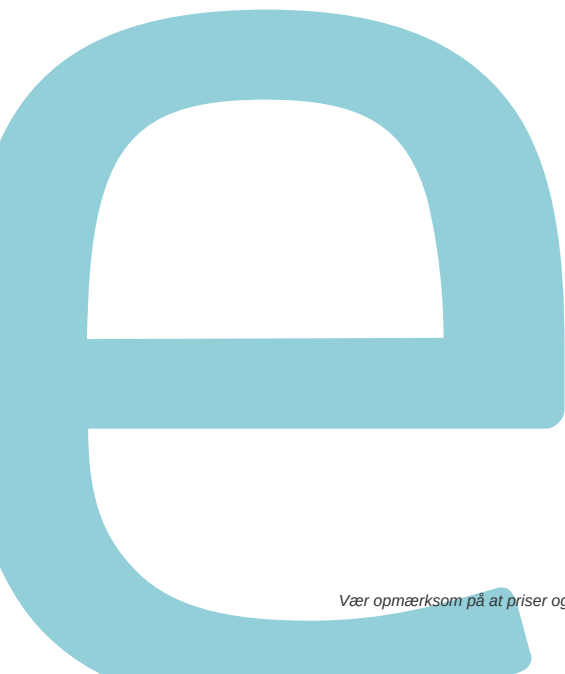

Display

Dynamic Contrast Ratio:	30000:1
Brightness:	700 cd/m ²
Viewing Angle:	178 degrees
Viewing Angle (Vertical):	178 degrees
Response Time:	8 ms
Commercial Features:	SMART Signage Platform, MagicInfo S6 Player
Operation Hours / Days:	24 / 7
Features:	Daisy Chain