


TP-Link SafeStream TL-R605 - router - desktop

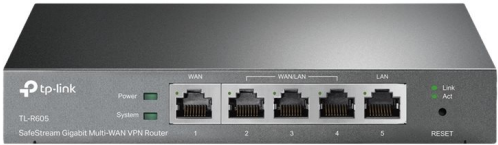

In Stock(3)

SKU	TL-R605
Product Description:	TP-Link SafeStream TL-R605 - router - desktop
Device Type:	Router - 4-port switch (integrated)
Enclosure Type:	Desktop
WAN Ports Qty:	1
Data Link Protocol:	Ethernet, Fast Ethernet, Gigabit Ethernet
Performance:	VPN throughput (IPSec): 41.5 Mbps
Capacity:	IPSec VPN tunnels: 20 PPTP VPN tunnels: 16 L2TP VPN tunnels: 16 Concurrent sessions: 25000

General

Device Type:	Router - 4-port switch (integrated)
Enclosure Type:	Desktop
Connectivity Technology:	Wired
Data Link Protocol:	Ethernet, Fast Ethernet, Gigabit Ethernet
Performance:	VPN throughput (IPSec): 41.5 Mbps
Capacity:	IPSec VPN tunnels: 20 PPTP VPN tunnels: 16 L2TP VPN tunnels: 16 Concurrent sessions: 25000
Network / Transport Protocol:	TCP/IP, PPTP, L2TP, NTP, ICMP/IP, IPSec, PPPoE, FTP, DHCP, DNS, SIPs, HTTP, HTTPs

Routing Protocol:	IGMPv2, static IP routing, IGMPv3
Remote Management Protocol:	SNMP
Encryption Algorithm:	DES, Triple DES, MD5, IKE, SHA-1, 128-bit AES, 192-bit AES, 256-bit AES

Environmental Parameters

Min Operating Temperature:	0 °C
Max Operating Temperature:	40 °C
Humidity Range Operating:	10 - 90% (non-condensing)

Dimensions & Weight

Width:	15.8 cm
Depth:	10.1 cm
Height:	2.5 cm

Software / System Requirements

OS Required:	UNIX, Apple MacOS, Novell NetWare, Linux, Microsoft Windows 98SE/2000/NT/ME/XP/Vista/7
--------------	--

Power

Power Device:	External power adapter
Voltage Required:	DC 9 V
Electric Current Required:	0.85 A

Expansion / Connectivity

General

Features: NAT support, SPI, VPN passthrough, IP address filtering, firmware upgradable, LAN-to-LAN bridging, ACL support, DPD, virtual server support, DHCP server, reset button, bandwidth control, port triggering, SPIF, IP-MAC binding, DHCP client, Diagnostic Function, Ping of Death, IGMP proxy, Captive Portal, DHCP reservation, system log, ARP inspection, port filtering, PFS, ZTP, DoS protection, DMZ support, DynDNS, schedule reboot

Compliant Standards: IEEE 802.3, IEEE 802.3u, IEEE 802.1Q, IEEE 802.3ab, IEEE 802.3x, UPnP, FCC, RoHS

RAM: 128 MB

Flash Memory: 16 MB

Status Indicators: Power, system, WAN, LAN

Expansion / Connectivity

Interfaces: WAN: 1 x 10Base-T/100Base-TX/1000Base-T - RJ-45 | WAN / LAN: 3 x 10Base-T/100Base-TX/1000Base-T - RJ-45 | LAN: 1 x 10Base-T/100Base-TX/1000Base-T - RJ-45

IP Telephony

VoIP Protocols: H.323

