


TP-Link TL-SF1024M - switch - 24 ports



16-05-2024

SKU	TL-SF1024M
Product Description:	TP-Link TL-SF1024M - switch - 24 ports
Device Type:	Switch - 24 ports
Subtype:	Fast Ethernet
Ports:	24 x 10/100
Performance:	Switching capacity: 4.8 Gbps
MAC Address Table Size:	8K entries
Features:	Flow control, full duplex capability, auto-negotiation, auto-uplink (auto MDI/MDI-X), store and forward, half duplex mode, Green Ethernet, fanless, Back Pressure Support

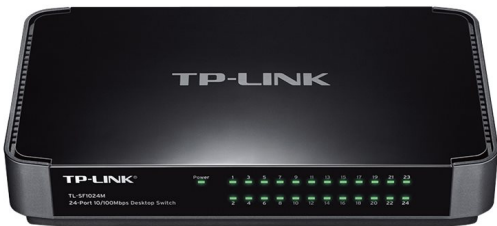

General

Device Type:	Switch - 24 ports
Enclosure Type:	Desktop
Subtype:	Fast Ethernet
Ports:	24 x 10/100
Performance:	Switching capacity: 4.8 Gbps
MAC Address Table Size:	8K entries
Features:	Flow control, full duplex capability, auto-negotiation, auto-uplink (auto MDI/MDI-X), store and forward, half duplex mode, Green Ethernet, fanless, Back Pressure Support
Compliant Standards:	IEEE 802.3, IEEE 802.3u, IEEE 802.3i, IEEE 802.3x
Status Indicators:	Power, link/activity

Environmental Parameters

Min Operating Temperature:	0 °C
Max Operating Temperature:	40 °C
Humidity Range Operating:	10 - 90% (non-condensing)
Min Storage Temperature:	-40 °C
Max Storage Temperature:	70 °C
Humidity Range Storage:	5 - 90% (non-condensing)

Dimensions & Weight

Width:	22.2 cm
Depth:	12.6 cm
Height:	4.5 cm

Miscellaneous

Compliant Standards:	FCC, RoHS
----------------------	-----------

Power

Power Device:	External power adapter
Voltage Required:	AC 120/230 V (50/60 Hz)
Power Consumption Operational:	3.68 Watt

Expansion / Connectivity

Interfaces:	24 x 100Base-TX RJ-45
-------------	-----------------------

