

Zebra LI2208 - barcode scanner



13-06-2024

SKU	LI2208-SR7U2100AZW
Product Description:	Zebra LI2208 - barcode scanner
Type:	Barcode scanner - handheld - USB - decoded
Colour:	Twilight black
Localisation:	Worldwide
Minimum Bar Width:	3 mil
Scan Field Width:	2.5 cm - 78.7 cm
Scan Element Type:	Linear imager

General

Type:	Barcode scanner - handheld
Colour:	Twilight black
Localisation:	Worldwide

Environmental Parameters

Min Operating Temperature:	0 °C
Max Operating Temperature:	50 °C
Humidity Range Operating:	5 - 95% (non-condensing)
Drop Specification:	1.8 m to concrete

Manufacturer Warranty

Service & Support:	Limited warranty - 5 years
--------------------	----------------------------

Dimensions & Weight

Width:	9.9 cm
Depth:	16 cm
Height:	6.7 cm
Weight:	140 g

Software


Software Included:	Drivers & Utilities
--------------------	---------------------

Power

Electric Current Required:	40 mA (standby), 165 mA (operating)
----------------------------	-------------------------------------

Miscellaneous

Cables Included:	1 x USB cable - 2.1 m
------------------	-----------------------

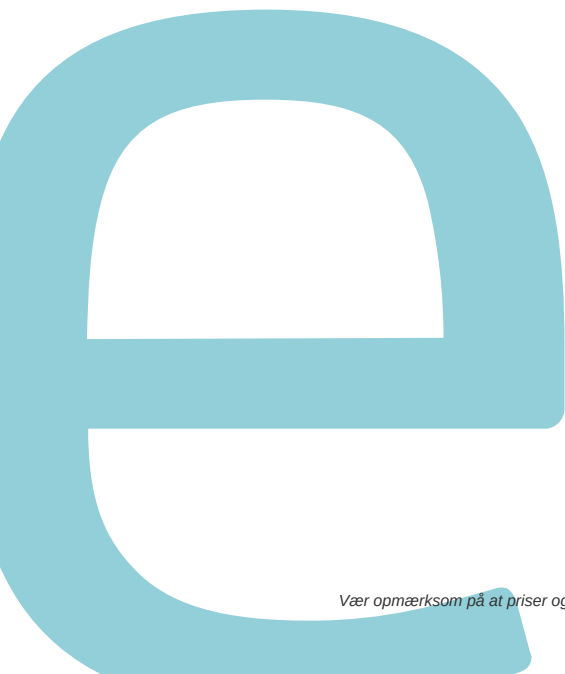

Miscellaneous

Compliant Standards:	IEC 60601-1-2, ICES-003 Class B, FCC Part 15 B, RoHS, UL 60950-1, IEC 60950-1, EN 60950-1, CSA C22.2 No. 60950-1, IP42
-----------------------------	--

Expansion / Connectivity

Interfaces:	1 x USB - Type A
--------------------	------------------

Barcode

Interface Type:	USB
------------------------	-----

Minimum Bar Width:	3 mil
---------------------------	-------

Scan Field Width:	2.5 cm - 78.7 cm
--------------------------	------------------

Scan Element Type:	Linear imager
---------------------------	---------------

Light Source Wave Length:	617 nm
----------------------------------	--------

Scan Mode:	Single-pass
-------------------	-------------

Scan Speed:	547 scan / sec
--------------------	----------------

Max Working Distance:	6 m
------------------------------	-----

Skew (Degrees):	65
------------------------	----

Pitch (Degrees):	65
-------------------------	----

Print Contrast Signal (PCS):	15%
-------------------------------------	-----

Decode Capability:	EAN/JAN, Code 93, Matrix 2 of 5, Code 39, UCC/EAN-128, ISBT 128, NW-7, ISBN, GS1 DataBar, Bookland, Code 32, Code 39 Full ASCII, EAN/JAN-8, EAN/JAN-13, UPC-A, UPC-E, Discrete 2 of 5, Italy Pharmacode, Codabar, Code 128, Code 11, UPC, Interleaved 2 of 5, ITF, IATA 2 of 5, UPC-E1, GS1 DataBar-14, Code 39 Trioptic, GS1 DataBar Expanded, GS1 DataBar Limited
---------------------------	---

Barcode

TTL	
Decoding:	Decoded
Connectivity	
Technology:	Wired

