

Zebra LI4278 - barcode scanner



In Stock(1159)

SKU	LI4278-TRBU0100ZER
Product Description:	Zebra LI4278 - barcode scanner
Type:	Barcode scanner - handheld - Bluetooth 2.1 - decoded
Colour:	Black
Localisation:	EMEA
Minimum Bar Width:	3 mil
Scan Element Type:	Visible laser diode
Scan Speed:	547 scan / sec

General

Type:	Barcode scanner - handheld
Colour:	Black
Localisation:	EMEA

Environmental Parameters

Min Operating Temperature:	0 °C
Max Operating Temperature:	50 °C
Humidity Range Operating:	5 - 85% (non-condensing)
Drop Specification:	1.8 m to concrete

Manufacturer Warranty

Service & Support:	Limited warranty - 3 years
--------------------	----------------------------

Dimensions & Weight


Width:	7 cm
Depth:	18.6 cm
Height:	9.8 cm
Weight:	224 g

Software

Software Included:	Drivers & Utilities
--------------------	---------------------

Miscellaneous

Included Accessories:	Cradle
-----------------------	--------

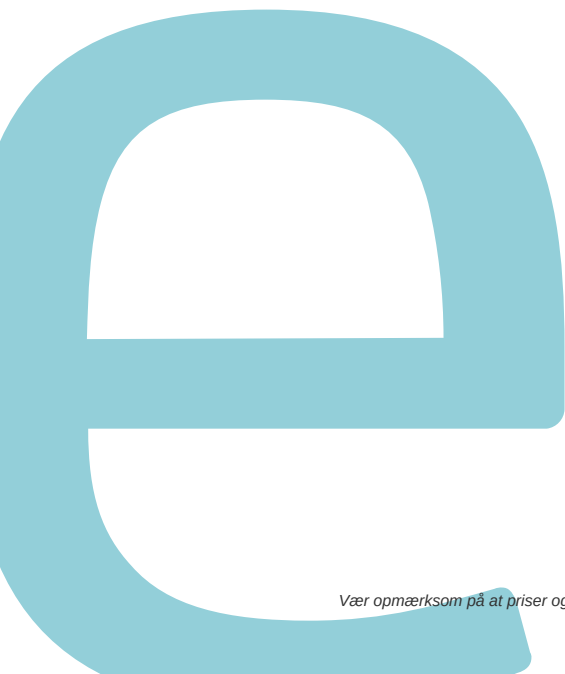

Miscellaneous

Cables Included:	1 x USB cable - external - 2.1 m
Compliant Standards:	IEC 60601-1-2, ICES-003 Class B, FCC Part 15 B, RoHS, UL 60950-1, IEC 60950-1, EN 60950-1, CSA C22.2 No. 60950-1

Networking

Wireless Connectivity:	Bluetooth 2.1
------------------------	---------------

Barcode

Interface Type:	Bluetooth 2.1
Minimum Bar Width:	3 mil
Scan Element Type:	Visible laser diode
Light Source Wave Length:	617 nm
Scan Mode:	Single-pass
Scan Speed:	547 scan / sec
Max Working Distance:	6 m
Skew (Degrees):	65
Pitch (Degrees):	65
Print Contrast Signal (PCS):	15%
Decode Capability:	EAN/JAN, Code 93, Matrix 2 of 5, Code 39, UCC/EAN-128, ISBT 128, NW-7, IATA, ISBN, GS1 DataBar, Bookland, Code 32, Code 39 Full ASCII, EAN/JAN-8, EAN/JAN-13, UPC-A, UPC-E, Discrete 2 of 5, Codabar, Code 128, Code 11, UPC, Interleaved 2 of 5, ITF, IATA 2 of 5, UPC-E1, GS1 DataBar-14, Code 39 Trioptic, GS1 DataBar Expanded, GS1 DataBar Limited

Barcode

TTL Decoding:	Decoded
Connectivity Technology:	Wireless
Features:	Triggered

