

Zebra ZD421d - label printer - B/W - direct thermal



In Stock(338)

SKU	ZD4A042-D0EE00EZ
Product Description:	Zebra ZD421d - label printer - B/W - direct thermal
Printer Type:	Label printer - direct thermal - B/W
Weight:	1.35 kg
Localisation:	United Kingdom, Europe
Max Media Size:	Roll (10.8cm)
Min Media Size (Custom):	15 mm
Max Media Size (Custom):	108 mm x 991 mm

General

Printer Type:	Label printer - direct thermal - monochrome
Enclosure Colour:	Grey
Localisation:	United Kingdom, Europe

Printer

Print Speed:	Up to 152 mm/sec - max speed
Connectivity Technology:	Wired
Interface:	USB 2.0, LAN, USB host
Max Resolution (B&W):	203 dpi
Language Simulation:	ZPL II, EPL2, ZBI, Extensible Mark-up Language (XML), PDF Direct
Features:	Realtime clock, Print Touch tag, transmissive/gap sensor, reflective/black mark sensor
Fonts Included:	16 x bitmapped ZPL II ; 2 x scalable ZPL ; 5 x expandable EPL2
Barcodes:	Code 93, Industrial 2 of 5, Code 39, Code 49, CODABLOCK, ISBT 128, QR code, MaxiCode, Aztec code, LOGMARS, UPC-A, UPC-E, MicroPDF417, Codabar, Code 128, Code 11, Interleaved 2 of 5, Postnet, PDF417, Data Matrix, PLANET, Plessey, Standard 2 of 5, EAN-8, EAN-13, MSI

Dimensions & Weight

Width:	17.75 cm
Depth:	22.08 cm
Height:	15.07 cm
Weight:	1.35 kg

Environmental Parameters

Min Operating Temperature:	4.4 °C
Max Operating Temperature:	41 °C
Humidity Range Operating:	10 - 90% (non-condensing)

Manufacturer Warranty

Service & Support:	Limited warranty - 2 years
--------------------	----------------------------

Environmental Standards

ENERGY STAR:	Yes
--------------	-----

Power

Power Device:	Power adapter - external
Voltage Required:	AC 120/230 V
Frequency Required:	50/60 Hz
Power Factor Correction:	Yes

RAM

RAM Installed (Max):	256 MB
Technology / Form Factor:	SDRAM

Flash Memory

Flash Memory:	512 MB
---------------	--------

Miscellaneous

Included Accessories:	2 core adapters, 2 ribbon cores
Cables Included:	1 x USB cable
Features:	Printer setup mobile app via BLE connection

Compliant Standards:	FCC Class B certified, VCCI, C-Tick, BSMI, EN 61000-3-2, ICES-003, NOM, SABS, EN 61000-3-3, EN55024, EN55022 Class B, FCC Part 15.247, CCC, IC, IEC 60950-1, KCC, FCC Part 15.209, S Mark, cTUVus, EN 62311, EN 300 328, BIS, INMETRO, CU, RSS-247, IEC 62368-1, EN 301 893, RoHS 2011/65/EU Amendment 2015/863
----------------------	---

Expansion / Connectivity

Connections:	1 x USB 2.0 - 4 pin USB Type B 1 x USB host - 4 pin USB Type A 1 x LAN - RJ-45
--------------	--

Networking

Networking:	Print server
-------------	--------------

Media Handling

Media Type:	Receipt paper, tag stock, continuous labels, die cut labels, wristband labels, fanfold labels
-------------	---

Max Media Size:	Roll (10.8cm)
-----------------	---------------


Min Media Size (Custom):	15 mm
--------------------------	-------

Max Media Size (Custom):	108 mm x 991 mm
--------------------------	-----------------

Media Sizes:	Roll (1.5 - 10.8 cm)
--------------	----------------------

Max Printing Width:	104 mm
---------------------	--------

Media Thickness Range:	0.08 mm - 0.19 mm
------------------------	-------------------

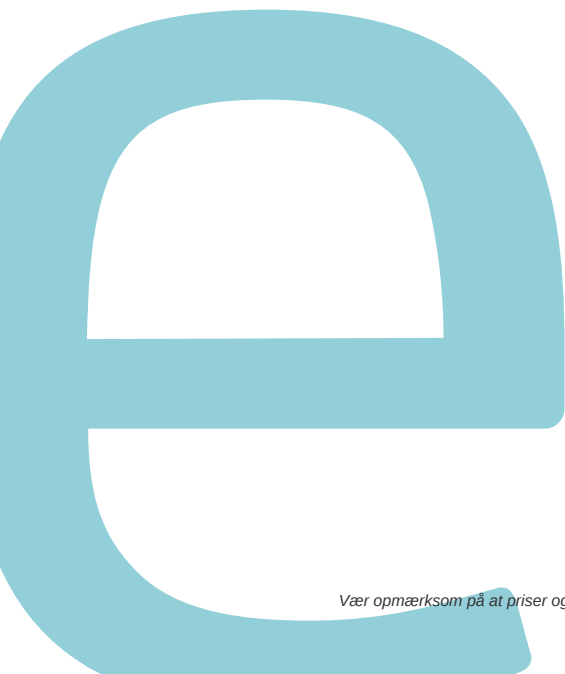

Media Handling

Roll Maximum Outer Diameter:	127 mm
---------------------------------------	--------

Roll Core Diameter:	25.4 mm, 76.2 mm, 38.1 mm, 12.7 mm, 50.8 mm
------------------------	--

Media Feeders:	1 x manual - 1 roll - Roll (10.8cm)
-------------------	-------------------------------------

