


HP E23 G4 - E-Series - LED monitor - Full HD (1080p) - 23"

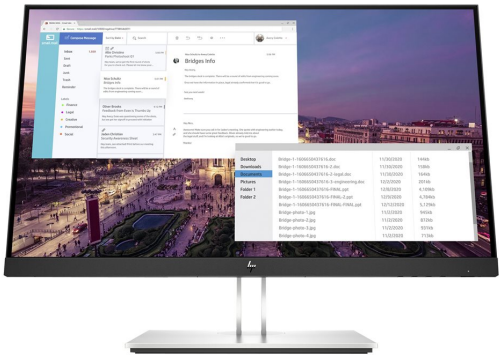

In Stock(2)

SKU	9VF96A3#ABB
Product Description:	HP E23 G4 - E-Series - LED monitor - Full HD (1080p) - 23"
Device Type:	LED-backlit LCD monitor - 23"
Energy Class:	Class E
Energy Consumption per Year:	24 kWh
Power Consumption (On mode):	16 W
Features:	USB 3.2 Gen 1 hub
Panel Type:	IPS

General

Display Type:	LED-backlit LCD monitor / TFT active matrix
Energy Class:	Class E
Energy Consumption per Year:	24 kWh
Diagonal Size:	23"
Built-in Devices:	USB 3.2 Gen 1 hub
Panel Type:	IPS
Aspect Ratio:	16:9
Native Resolution:	Full HD (1080p) 1920 x 1080 at 60 Hz
Pixel Pitch:	0.265 mm
Pixel Per Inch:	96
Brightness:	250 cd/m ²
Contrast Ratio:	1000:1 / 5000000:1 (dynamic)
Colour Gamut:	72% NTSC
Response Time:	5 ms (grey-to-grey with overdrive)
Vertical Refresh Rate:	50 - 60 Hz

Environmental Parameters

Min Operating Temperature:	5 °C
Max Operating Temperature:	35 °C
Humidity Range Operating:	20 - 80% (non-condensing)

Manufacturer Warranty

Service & Support:	Limited warranty - parts and labour - 3 years
--------------------	---

Sustainability Information

TCO Certified:	TCO Certified Displays 8, TCO Certified Edge Displays
ENERGY STAR Certified:	Yes
ENERGY STAR Version:	8.0

Dimensions & Weight (Shipping)

Shipping Width:	58.1 cm
Shipping Depth:	22.3 cm
Shipping Height:	37.2 cm
Shipping Weight:	8 kg

Dimensions & Weight

General

Horizontal Refresh Rate: 30 - 80 kHz

Horizontal Viewing Angle: 178

Vertical Viewing Angle: 178

Screen Coating: Anti-glare, 3H Hard Coating

Backlight Technology: LED backlight

Colour Temperature: 6500K

OSD Languages: Chinese (traditional), Chinese (simplified), English, German, French, Italian, Portuguese, Spanish, Dutch, Japanese

Features: Low Blue Light Mode, Flicker Free technology, Mercury free, arsenic free, 3-sided micro-edge, 6-bit + FRC Color Depth, edge-lit LED backlight, 72% NTSC colour gamut

Colour: Silver, black head

Dimensions (WxDxH): 52.16 cm x 20.7 cm x 48.98 cm - with stand

Weight: 5.4 kg

Connectivity

Interfaces: DisplayPort 1.2 | HDMI | VGA | 4 x USB 3.2 Gen 1 downstream | USB 3.2 Gen 1 upstream (Type B)

Mechanical

Display Position Adjustments: Height, pivot (rotation), swivel, tilt

Tilt Angle: -5/+23

Swivel Angle: 90

Rotation Angle: 180

Height Adjustment: 150 mm

VESA Mounting Interface: 100 x 100 mm

Dimensions & Weight

Dimensions & Weight Details: With stand - width: 52.16 cm - depth: 20.7 cm - height: 48.98 cm - weight: 5.4 kg | Without stand - width: 52.16 cm - depth: 4.7 cm - height: 31.31 cm - weight: 3.12 kg

Software / System Requirements

Included Software: HP Display Center

Power

Input Voltage: AC 120/230 V (50/60 Hz)

Power Consumption (On mode): 16 W

Power Consumption SDR (On mode): 16 kWh/1000h

Power Consumption (Typical): 26 Watt

Power Consumption Stand by: 0.5 Watt

Miscellaneous

Features: Security lock slot (cable lock sold separately), detachable stand, VESA interface support

Backlight Life: 30,000 hours

Compliant Standards: Plug and Play, VCCI, BSMI, NOM, TUV S, WHQL, CB, CCC, PSB, FCC, ISO 9241-307, KCC, WEEE, cTUVus, MEPS, KC, CECP, CEL, EAC, CEL Grade 1, ISC, SEPA, BIS, low halogen, DisplayPort 1.2, ICE, UAE, HDCP

Localisation: English / Europe

Security Slot Type: Kensington security slot