


HP P22 G4 - P-Series - LED monitor - Full HD (1080p) - 21.5"

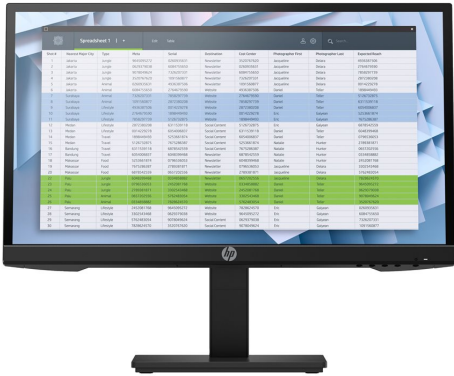

16-05-2024

SKU	1A7E4AA#ABB
Product Description:	HP P22 G4 - P-Series - LED monitor - Full HD (1080p) - 21.5"
Device Type:	LED-backlit LCD monitor - 21.5"
Energy Class:	Class E
Energy Consumption per Year:	19.3 kWh
Power Consumption (On mode):	14 W
Panel Type:	IPS
Aspect Ratio:	16:9

General

Display Type:	LED-backlit LCD monitor / TFT active matrix
Energy Class:	Class E
Energy Consumption per Year:	19.3 kWh
Diagonal Size:	21.5"
Panel Type:	IPS
Aspect Ratio:	16:9
Native Resolution:	Full HD (1080p) 1920 x 1080 at 60 Hz
Pixel Pitch:	0.24795 mm
Pixel Per Inch:	102
Brightness:	250 cd/m ²
Contrast Ratio:	1000:1 / 8000000:1 (dynamic)
Response Time:	5 ms (grey-to-grey with overdrive)
Vertical Refresh Rate:	48 - 75 Hz
Horizontal Refresh Rate:	30 - 86 kHz
Horizontal Viewing Angle:	178

Environmental Parameters

Min Operating Temperature:	5 °C
Max Operating Temperature:	35 °C
Humidity Range Operating:	20 - 80% (non-condensing)

Sustainability Information

EPEAT Compliant:	EPEAT Silver
ENERGY STAR Certified:	Yes
ENERGY STAR Version:	8.0

Dimensions & Weight (Shipping)

Shipping Width:	56.7 cm
Shipping Depth:	18.9 cm
Shipping Height:	38.5 cm
Shipping Weight:	5.65 kg

Dimensions & Weight

Dimensions & Weight Details:	With stand - width: 49.73 cm - depth: 21.16 cm - height: 45.49 cm - weight: 4.14 kg Without stand - width: 49.73 cm - depth: 4.59 cm - height: 30.11 cm - weight: 2.06 kg
------------------------------	--

Software / System Requirements

General

Vertical Viewing Angle: 178

Screen Coating: Anti-glare, 3H Hard Coating

Backlight Technology: LED backlight

Colour Temperature: 6500K

OSD Languages: Chinese (traditional), Chinese (simplified), English, German, French, Italian, Portuguese, Spanish, Dutch, Japanese

Features: HDCP, Low Blue Light Mode, Flicker Free technology, Color Calibrated, 3-sided micro-edge, 6-bit + A-FRC Color Depth

Colour: Black

Dimensions (WxDxH): 49.73 cm x 21.16 cm x 45.49 cm - with stand

Weight: 4.14 kg

Connectivity

Interfaces: DisplayPort (HDCP) | HDMI (HDCP) | VGA

Mechanical

Display Position Adjustments: Tilt

Tilt Angle: -5/+23

VESA Mounting Interface: 100 x 100 mm

Software / System Requirements

Included Software: HP Display Assistant

Power

Input Voltage: AC 120/230 V (50/60 Hz)

Power Consumption (On mode): 14 W

Power Consumption SDR (On mode): 14 kWh/1000h

Power Consumption (Typical): 19 Watt

Power Consumption Stand by: 0.3 Watt

Miscellaneous

Features: Security lock slot (cable lock sold separately), detachable stand, VESA interface support, HDCP Compliant, arsenic free, mercury free

Cables Included: 1 x HDMI cable - 1.8 m | 1 x DisplayPort cable - 1.8 m

Backlight Life: 30,000 hours

Compliant Standards: Plug and Play, CSA, UL, VCCI, BSMI, NOM, TUV S, CB, CCC, PSB, FCC, ISO 9241-307, KCC, WEEE, ICES, KC, CEL, EAC, ISC, DisplayPort 1.2, Australian-New Zealand MEPS, Vietnam MEPS

Localisation: English / Europe

Security Slot Type: Kensington security slot

