


Intel Compute Module HNS2600BPS24R - blade - no CPU - 0 GB - no HDD

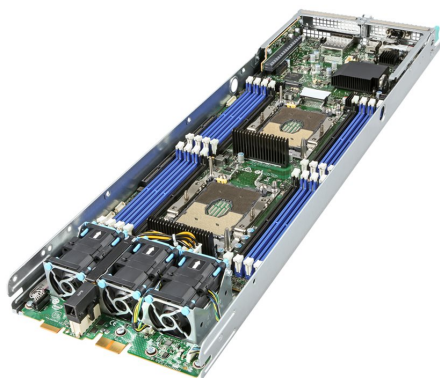

Not in stock

SKU	HNS2600BPS24R
Product Description:	Intel Compute Module HNS2600BPS24R - blade - no CPU - 0 GB - no HDD
Type:	Server - blade
Server Scalability:	2-way
Processor:	No CPU
Processor Socket:	Socket P
RAM:	0 GB (installed) / 2.8 TB (max) - DDR4 SDRAM - ECC
Storage Controller:	SATA (SATA 6Gb/s)

General

Type:	Server
Product Form Factor:	Blade
Embedded Security:	Trusted Platform Module (TPM 2.0) Security Chip
Server Scalability:	2-way

Dimensions & Weight (Shipping)

Shipping Width:	27.2 cm
Shipping Depth:	72 cm
Shipping Height:	16 cm
Shipping Weight:	5.6 kg

Processor / Chipset

CPU:	No CPU
Max CPU Qty:	2
CPU Upgradability:	Upgradable
CPU Socket:	Socket P
Chipset Type:	Intel C622

Dimensions & Weight

Width:	17.75 cm
Depth:	63.103 cm
Height:	4.081 cm
Weight:	4.32 kg

RAM

Installed Size:	0 GB / 2.8 TB (max)
Technology:	DDR4 SDRAM - ECC
Form Factor:	DIMM 288-pin
Slots:	16 (Total) / 16 (empty)
Features:	Registered, Load-Reduced DIMM (LRDIMM)

Manufacturer Warranty

Service & Support:	Limited warranty - 3 years
--------------------	----------------------------

Miscellaneous

Included Accessories:	2 x CPU Heatsink, air duct, 3 x system fans, M.2 (80 mm) riser card
-----------------------	---

Expansion / Connectivity

Slots:	1 (total) / 1 (free) x M.2 Card - 2242 4 (total) / 4 (free) x expansion slot
Interfaces:	1 x VGA 2 x USB 3.0 2 x LAN (10Gigabit Ethernet) - SFP+ 1 x management - RJ-45

Hard Drive

Type: No HDD

Storage Controller

Type: SATA

Controller Interface Type: SATA 6Gb/s

Channel Qty: 8

RAID Level: RAID 0, RAID 1, RAID 5, RAID 10, RAID 50

Optical Storage

Type: No optical drive

Monitor

Monitor Type: None.

Networking

Ethernet Ports: 2 x SFP+

Ethernet Controller: Intel X722

Data Link Protocol: Ethernet, Fast Ethernet, Gigabit Ethernet, 10 Gigabit Ethernet

Remote Management Protocol: IPMI 2.0

Remote Management Controller: Intel Baseboard Management Controller (BMC)

Features: Integrated BMC with IPMI

Graphics Controller

Graphics Processor: ASPEED AST2500

Video Interfaces: VGA

